

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
28 February 2002 (28.02.2002)

PCT

(10) International Publication Number  
WO 02/16257 A2

- (51) International Patent Classification<sup>7</sup>: C01B 77450 (US). O'CONNELL, Michael [US/US]; 2111 Holly Hall, Apartment 2702, Houston, TX 77054 (US).
- (21) International Application Number: PCT/US01/26308
- (22) International Filing Date: 23 August 2001 (23.08.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:  
60/227,604 24 August 2000 (24.08.2000) US  
60/268,269 13 February 2001 (13.02.2001) US
- (71) Applicant (for all designated States except US): WILLIAM MARSH RICE UNIVERSITY [US/US]; 6100 Main Street, Houston, TX 77005 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): SMALLEY, Richard, E. [US/US]; 1816 Bolsover Street, Houston, TX 77005 (US). COLBERT, Daniel, T. [US/US]; 1911 Milford Street, Houston, TX 77098 (US). SMITH, Ken, A. [US/US]; 333 Dominion, Apartment 1334, Katy, TX
- (74) Agents: GARSSON, Ross, Spencer et al.; Winstead Sechrest & Minick P.C., P.O. Box 50784, 1201 Main Street, Dallas, TX 75250-0784 (US).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: POLYMER-WRAPPED SINGLE WALL CARBON NANOTUBES



(57) Abstract: The present invention relates to new compositions of matter and articles of manufacture comprising SWNTs as nanometer scale conducting rods dispersed in an electrically-insulating matrix. These compositions of matter have novel and useful electrical, mechanical, and chemical properties including applications in antennas, electromagnetic and electro-optic devices, and high-toughness materials. Other compositions of matter and articles of manufacture are disclosed, including polymer-coated and polymer wrapped single-wall nanotubes (SWNTs), small ropes of polymer-coated and polymer-wrapped SWNTs and materials comprising same. The composition provides one embodiment of the SWNT conducting-rod composite mentioned above, and also enables creation of high-concentration suspensions of SWNTs and compatibilization of SWNTs with polymeric matrices in composite materials. This solubilization and compatibilization, in turn, enables chemical manipulation of SWNT and production of composite fibers, films, and solids comprising SWNTs.

WO 02/16257 A2

BEST AVAILABLE COPY



**Published:**

— without international search report and to be republished  
upon receipt of that report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

## POLYMER-WRAPPED SINGLE WALL CARBON NANOTUBES

## FIELD OF THE INVENTION

5 The present invention relates generally to carbon nanotubes, and more particularly relates to materials containing single-wall carbon nanotubes and non-covalently derivatized single-wall carbon nanotubes.

## BACKGROUND OF THE INVENTION

10 Fullerenes are closed-cage molecules composed entirely of  $sp^2$ -hybridized carbons, arranged in hexagons and pentagons. Fullerenes (e.g.,  $C_{60}$ ) were first identified as closed spheroidal cages produced by condensation from vaporized carbon.

15 Fullerene tubes are produced in carbon deposits on the cathode in carbon arc methods of producing spheroidal fullerenes from vaporized carbon. Ebbesen et al. (Ebbesen I), "Large-Scale Synthesis Of Carbon Nanotubes," *Nature*, Vol. 358, p. 220 (July 16, 1992) and Ebbesen et al., (Ebbesen II), "Carbon Nanotubes," *Annual Review of Materials Science*, Vol. 24, p. 235 (1994). Such tubes are referred to herein as carbon nanotubes. Many of the carbon nanotubes made by these processes were multi-wall nanotubes, i.e., the carbon nanotubes resembled concentric cylinders. Carbon nanotubes having up to seven walls have been described in the prior art. Ebbesen II; Iijima et al., "Helical Microtubules Of Graphitic Carbon," *Nature*, Vol. 354, p. 56 (November 7, 1991).

20 In defining single-wall carbon nanotubes, it is helpful to use a recognized system of nomenclature. In this application, the carbon nanotube nomenclature described by M. S. Dresselhaus, G. Dresselhaus, and P. C. Eklund, *Science of Fullerenes and Carbon Nanotubes*, Chap. 19, especially pp. 756-760, (1996), published by Academic Press, 525 B Street, Suite 1900, San Diego, California 92101-4495 or 6277 Sea Harbor Drive, Orlando, Florida 32877 (ISBN 0-12-221820-5), which is hereby incorporated by reference, will be used. The single wall tubular fullerenes are distinguished from each  
25 other by double index (n,m) where n and m are integers that describe how to cut a single strip of hexagonal "chicken-wire" graphite so that its edges join seamlessly when it is wrapped to form a cylinder. When the two indices are the same,  $m=n$ , the resultant tube is said to be of the "arm-chair" (or n,n) type, since when the tube is cut perpendicular to the tube axis, only the sides of the hexagons are exposed and their pattern around the periphery of the tube edge resembles the arm and seat of an arm chair repeated n times. Arm-chair tubes are one form of single-wall carbon nanotubes; they are truly metallic, and have extremely high electrical conductivity. Other nanotube geometries, where  $(n-m)/3$  is an integer are semi-metallic, i.e. they have a small band-gap and are good electrical  
30 conductors at temperatures relevant to the operation of almost all electronic materials and devices. The remaining nanotube geometries where  $(n-m)/3$  is not an integer are semiconductors, having a band-gap in the neighborhood of 1 eV, which varies with inversely with their individual diameters. See Odom et al, *J. Phys. Chem. B*, vol. 104 p.2794 (2000). In addition, all single-wall nanotubes are the stiffest molecules known, and have extremely high thermal conductivity and tensile strength. See Yakobson and Smalley, *Am. Sci.* vol. 85, p. 324 (1997).

Single-wall carbon nanotubes have been made in a DC arc discharge apparatus of the type used in fullerene production by simultaneously evaporating carbon and a small percentage of Group VIII transition metal from the anode of the arc discharge apparatus. See Iijima et al., "Single-Shell Carbon Nanotubes of 1 nm Diameter," *Nature*, Vol. 363, p.603 (1993); Bethune et al., "Cobalt Catalyzed Growth of Carbon Nanotubes with Single Atomic Layer Walls," *Nature*, Vol. 63, p. 605 (1993); Ajayan et al., "Growth Morphologies During Cobalt Catalyzed Single-Shell Carbon Nanotube Synthesis," *Chem. Phys. Lett.*, Vol. 215, p. 509 (1993); Zhou et al., "Single-Walled Carbon Nanotubes Growing Radially From  $YC_2$  Particles," *Appl. Phys. Lett.*, Vol. 65, p.1593 (1994); Seraphin et al., "Single-Walled Tubes and Encapsulation of Nanocrystals Into Carbon Clusters," *Electrochem. Soc.*, Vol. 142, p. 290 (1995); Saito et al., "Carbon Nanocapsules Encaging Metals and Carbides," *J. Phys. Chem. Solids*, Vol. 54, p. 1849 (1993); Saito et al., "Extrusion of Single-Wall Carbon Nanotubes Via Formation of Small Particles Condensed Near an Evaporation Source," *Chem. Phys. Lett.*, Vol. 236, p. 419 (1995). It is also known that the use of mixtures of such transition metals can significantly enhance the yield of single-wall carbon nanotubes in the arc discharge apparatus. See Lambert et al., "Improving Conditions Toward Isolating Single-Shell Carbon Nanotubes," *Chem. Phys. Lett.*, Vol. 226, p. 364 (1994).

While this arc discharge process can produce single-wall nanotubes, the yield of nanotubes is low and the tubes exhibit significant variations in structure and size between individual tubes in the mixture. Individual carbon nanotubes are difficult to separate from the other reaction products and purify.

An improved method of producing single-wall nanotubes is described in U.S. Patent 6,183,714, entitled "Method of Making Ropes of Single-Wall Carbon Nanotubes," incorporated herein by reference in its entirety. This method uses, *inter alia*, laser vaporization of a graphite substrate doped with transition metal atoms, preferably nickel, cobalt, or a mixture thereof, to produce single-wall carbon nanotubes in yields of at least 50% of the condensed carbon. The single-wall nanotubes produced by this method are much more pure than those produced by the arc-discharge method. Because of the absence of impurities in the product, the aggregation of the nanotubes is not inhibited by the presence of impurities and the nanotubes produced tend to be found in clusters, termed "ropes," of 10 to 5000 individual single-wall carbon nanotubes in parallel alignment, held together by van der Waals forces in a closely packed triangular lattice.

PCT/US/98/04513 entitled "Carbon Fibers Formed From Single-Wall Carbon Nanotubes" and which is incorporated by reference, in its entirety, discloses, *inter alia*, methods for cutting and separating nanotube ropes and manipulating them chemically by derivatization to form devices and articles of manufacture comprising nanotubes. Other methods of chemical derivatization of the side-walls of the carbon nanotubes are disclosed in PCT/US99/21366 entitled "Chemical Derivatization of Single Wall Carbon Nanotubes to Facilitate Solvation Thereof, and Use of Derivatized Nanotubes," which is incorporated by reference, in its entirety.

Another method for producing single-wall carbon nanotubes is described in PCT/US99/25702, (entitled "Gas-Phase Nucleation and Growth of Single-Wall Carbon Nanotubes from High Pressure

CO") incorporated herein in its entirety by reference, which describes a process involving supplying high pressure (e.g., 30 atmospheres) CO that has been preheated (e.g., to about 1000°C) and a catalyst precursor gas (e.g.,  $\text{Fe}(\text{CO})_5$ ) in CO that is kept below the catalyst precursor decomposition temperature to a mixing zone. In this mixing zone, the catalyst precursor is rapidly heated to a temperature that results in (1) precursor decomposition, (2) formation of active catalyst metal atom clusters of the appropriate size, and (3) favorable growth of single-wall carbon nanotubes ("SWNTs") on the catalyst clusters. Preferably a catalyst cluster nucleation agency is employed to enable rapid reaction of the catalyst precursor gas to form many small, active catalyst particles instead of a few large, inactive ones. Such nucleation agencies can include auxiliary metal precursors that cluster more rapidly than the primary catalyst, or through provision of additional energy inputs (e.g., from a pulsed or CW laser) directed precisely at the region where cluster formation is desired. Under these conditions SWNTs nucleate and grow according to the Boudouard reaction. The SWNTs thus formed may be recovered directly or passed through a growth and annealing zone maintained at an elevated temperature (e.g., 1000°C) in which tubes may continue to grow and coalesce into ropes.

In yet another method for production, single-walled carbon nanotubes have been synthesized by the catalytic decomposition of both carbon monoxide and hydrocarbons over a supported metal catalyst. Under certain conditions, there is no termination of nanotube growth, and production appears to be limited only by the diffusion of reactant gas through the product nanotube mat that covers the catalyst. "Catalytic Growth of Single-Wall Carbon Nanotubes from Metal Particles" (PCT/US99/21367) incorporated in its entirety by reference, details a catalyst-substrate system that promotes the growth of nanotubes that are predominantly single-walled tubes in a specific size range, rather than the large irregular-sized multi-walled carbon fibrils that are known to grow from supported catalysts. This method allows bulk catalytic production of predominantly single-wall carbon nanotubes from metal catalysts located on a catalyst-supporting surface.

Carbon nanotubes, and in particular, single-wall carbon nanotubes, are useful for making electrical connectors in micro devices such as integrated circuits or in semiconductor chips used in computers because of the electrical conductivity and small size of the carbon nanotube. The carbon nanotubes are useful as antennas at optical frequencies, as constituents of non-linear optical devices, and as probes for scanning probe microscopy such as are used in scanning tunneling microscopes (STM) and atomic force microscopes (AFM). The carbon nanotubes may be used in place of or in conjunction with carbon black in tires for motor vehicles, as elements of a composite materials to elicit specific physical, chemical or mechanical properties in those materials (e.g. electrical and/or thermal conductivity, chemical inertness, mechanical toughness, etc). The carbon nanotubes themselves and materials and structures comprising carbon nanotubes are also useful as supports for catalysts used in industrial and chemical devices and processes such as fuel cells, hydrogenation, reforming and cracking.

Individual SWNT and ropes of single-wall carbon nanotubes exhibit metallic conductivity, i.e., they will conduct electrical charges with a relatively low resistance. Nanotubes and ropes of nanotubes are useful in any application where an electrical conductor is needed, for example as an additive in

electrically conductive polymeric materials, paints or in coatings. Nanotubes and ropes of nanotubes have a propensity to aggregate into large networks, which are themselves electrically conductive, and this property enables them to form such networks when they are suspended in a matrix of a different material. The presence of this network alters the electrical properties of a composite that includes nanotubes.

Single-wall carbon nanotubes have outstanding properties as field-emitters for electrons, and serve well as the active element in cold-cathodes in any applications that involve emission of electrons, such as microwave power tubes and video displays.

#### SUMMARY OF THE INVENTION

Prior art reveals materials comprising SWNTs which have substantial bulk electrical conductivity derived from the conductive network of SWNTs. This invention provides a new class of materials that have low electrical conductivity, but contain individual nanotubes and small ropes of individual nanotubes which are themselves good electrical conductors, and serve as small conducting rods immersed in an electrically-insulating matrix. These materials represent a new composition of matter that has novel electrical and electronic properties that are distinct from those of previously known nanotube-containing materials.

This invention also provides another new composition of matter which is a single-wall carbon nanotube that is coated or wrapped with one or more polymer molecules. This coating or wrapping is one form of a non-covalent derivatization. "Coating" and "wrapping" are used interchangeably herein, and refer to the presence of a polymer molecule in contact with the exterior of a SWNT, whether the polymer molecule covers all or only part of the SWNT's exterior. The use of either "coating" or "wrapping" does not imply that the polymer is necessarily wrapped around a SWNT in a regular or symmetrical configuration. Also provided is a composition of matter comprising individual nanotubes and small ropes of nanotubes that are coated or wrapped with polymer molecules. The polymer that covers these small ropes and tubes attaches to the SWNTs through weak chemical forces that are primarily non-covalent in nature. These forces are due primarily to polarization, instead of sharing of valence electrons. Thus the properties of the SWNTs involved are substantially the same as that of free, individual SWNTs and small ropes of SWNTs. (A measured property is "substantially the same" if the measurements for this property are plus or minus twenty-five percent ( $\pm 25\%$ )). Thus SWNTs and small ropes of SWNTs that are electrically-conductive retain their individual electrical conductivity and other properties when they are coated with the polymer. Their high electrical conductivity makes the individual nanotubes highly electrically polarizable, and materials containing these highly polarizable molecules exhibit novel electrical properties, including a high dielectric constant when the SWNTs are electrically isolated from one another.

A polymer wrapping or coating greatly inhibits the Van der Waals attraction normally observed between separate SWNT and small ropes of SWNT. The polymer also interacts with solvents. The combination of the Van der Waals inhibition and polymer-solvent interaction causes the wrapped nanotubes to be much more readily suspended at high concentrations in solvents. This enables creation of high-concentration SWNT solutions and suspensions, which in turn substantially enables

manipulation of SWNT into bulk materials of many kinds, including films, fibers, solids, and composites of all kinds. This invention also includes treatment of the polymer-coated SWNT to remove the polymer coating and restore the pristine SWNT.

Aggregations of polymer-coated SWNTs produce a new material that has novel electrical properties such as a high dielectric constant. The novel electrical properties are isotropic in compositions where the SWNT are essentially randomly oriented with one another, such as in an electrically-insulating matrix. Anisotropic behavior of such materials will be obtained when the SWNTs are aligned by the application of an external aligning field, such as a magnetic field, electrical field, or shear flow field. Aggregations of polymer coated SWNTs are disclosed in which the SWNTs are substantially aligned in an insulating matrix and provide a new form of electrically-conducting rod composite, where the conducting rods have cross sectional dimensions on the nanometer scale and lengths of hundreds of nanometers or more, and the electrical properties of the composite are highly anisotropic.

The polymer wrappings or coatings can be chosen to make the polymer-associated SWNTs and ropes of SWNTs compatible with matrices of other materials to facilitate fabrication of composites. Composite materials of polymer-associated SWNTs suspended in a polymer matrix, provide a new form of polymeric composite. This composite material is novel in that the structure of the nanotube suspended is (in its cross sectional dimensions) substantially smaller than the typical scale length of the individual polymer molecules in the matrix. This microscopic dimensional compatibility minimizes the propensity of the composite to fail mechanically at the interface between the matrix and the SWNTs, producing a composite material with enhanced mechanical properties such as strain-to-failure, toughness, and resistance to mechanical fatigue. This composite also has the novel electrical properties discussed above, when the properties of SWNT in the matrix allow them to be electrically isolated from one another. In embodiments where there is incomplete electrical isolation between the SWNT, the mechanical enhancement of the composite is due to the similarity of scale in both the polymer and single wall carbon nanotube. Because of this similarity the SWNT and polymer establish a substantially more intimate contact than if their dimensional scales would not have been the same.

The above described materials are useful in mechanical or structural applications where enhanced material or structural mechanical properties are desired. The materials are also useful in electronic applications requiring a high-dielectric constant material, including but not limited to, capacitor dielectrics, circuit board materials, waveguide materials, optical index-matching materials, materials that absorb electromagnetic radiation, materials that re-direct electromagnetic radiation, optoelectronic materials, antenna arrays, and materials for suspending antennas, electrically-loading antennas to change their required length, and support of antenna arrays that provides advantages in the spacing of the individual antennas. These materials also serve as the active element for a range of transducers in that they change their physical dimensions in response to applied electric and magnetic fields. Applied in a way that they can come into contact with other chemicals, they also change dimensionally and electronically in response to adsorption of chemicals on the nanotube

surface, and therefore serve as chemical sensors and transducers that respond with a change of electrical and mechanical properties to the presence of specific chemicals.

For those materials in which the SWNT are mobile (such as in a suspension or solution of SWNT, produced by known means for suspending or solublizing SWNT known in the art), the materials' mechanical, electrical and electromagnetic properties are modified by application of an electric field that changes the orientation or location of the SWNT segments contained therein. These materials enable new electro-mechanical elements, fluids with electrically-controllable viscosity, opto-electronic elements where the character (e.g. intensity, polarization) of a electromagnetic wave transmitted through the SWNT-containing material is modified as a consequence of application of an electric field to the material.

#### Nanometer-scale conducting-rod materials

One aspect of the present invention is directed to the creation of novel SWNT-containing materials that have novel electronic and/or electromagnetic properties derived from the electrical conductivity and high electrical polarizability of the nanotubes. The invention includes means for creation of such materials, articles of manufacture incorporating such materials, and the materials themselves.

Electrically-conductive single-wall carbon nanotubes are the first known molecules that are excellent electrical conductors. An example of this carbon polymer is shown in Fig. 1. This large molecule can easily be manipulated through chemical means well known to those skilled in the art of polymer chemistry and by new means that are specific to the nanotube structure. Means of such chemical manipulation are disclosed in PCT/US/98/04513, cited above, as well as in Chemical Derivatization of Single Wall Carbon Nanotubes to Facilitate Solvation Thereof, and Use of Derivatized Nanotubes (PCT/US99/21366), incorporated herein in its entirety by reference. This invention applies the chemical facility of this molecule to enable new materials that have novel electrical and electromagnetic properties. This invention is novel in that it creates materials from individual SWNT, on a truly molecular basis. Prior art (see Grimes et al. *Chem. Phys. Lett.*, Vol. 319, p. 460, 2000) has shown that bundles of SWNT in a polymer matrix provide a composite material with a high dielectric constant. In that work, loading a poly-ethyl methacrylate matrix with mechanically-ground SWNT in bundles (nanotube ropes) of ~10 nm diameter provided a material with a bulk dielectric constant ranging between 10 and 140 for SWNT loadings ranging between 4 wt % and 23 wt %, respectively. The bundle lengths in that work were ~1 to 5 microns. The theoretical work of Lagarkov and Sarychev (*Phys. Rev. B*, vol. 53., no. 10, p. 6318, 1996), which is incorporated by reference in its entirety, illustrates that the ultimate dielectric constant of a composite material comprising electrically conducting rods in an electrically-insulating matrix depends strongly on the aspect ratio (length divided by diameter) of the conducting rods, and that for small concentrations of rods that the dielectric constant scales as the square of the aspect ratio. The dielectric constant is dependent on the concentration of the rods, peaking at the percolation threshold for the material. The peak value attained again depends on the aspect ratio of the conducting rods. Individual SWNT and small bundles of individual SWNT are molecular "conducting rods", and composite materials comprising



Individual SWNT and small bundles of SWNT in an electrically-insulating matrix are a direct embodiment of the predictions of Lagarkov and Sarychev and attain dielectric constants in excess of 1000.

Such materials with tailored electronic properties such as a large dielectric constant,  $\epsilon$ , or a controllable electric susceptibility tensor,  $\epsilon$ , are of significant importance in applications that include integrated logic circuits, radio frequency circuits, antennas, and energy storage. Such materials are also useful to manipulate electromagnetic radiation within the material and at its surfaces and interfaces. The response of conducting rod composite materials also demonstrates dispersive behavior, which is dependent on the frequency of the electromagnetic field to which the material is subjected. This dispersive behavior becomes resonant when the rod length is comparable to the wavelength of the incident radiation. (Lagarkov and Sarychev Phys. Rev. B, vol. 53, p. 6318). PCT/US/98/04513 entitled "Carbon Fibers Formed From Single-Wall Carbon Nanotubes" describes means for making individual SWNT and small SWNT bundles (<10 nm in diameter) available in lengths comparable to the wavelength of visible light, and therefore enables creation of "conducting rod composites" that have novel behavior in the visible light wavelength region, which include a high absorptivity for electromagnetic waves. Such materials have an extinction coefficient from about 0.001 to about 10 and a large real dielectric constant, which may be positive or negative, from about -100 to about 1000, and a substantial paramagnetic response for time-dependent excitation, even though the material's constituents are essentially-non magnetic. These novel characteristics, in turn give rise to implementations of the conducting-rod-composite material in optical applications including new configurations for lenses, reflectors, polarizers, and wavelength selectors. Clearly, in compositions of matter and devices where the SWNT are mobile, the electromagnetic properties of the composition or device are easily modified by the change in orientation or location of the SWNT within the material in response to an applied field or its gradient. Even in materials where the SWNT are mechanically constrained, however, the known response of nanotubes to electric fields, wherein their electronic property and, therefore, their conducting behavior is modified by strong electric (see Slepyan et al. Phys. Rev. B, vol. 57, p. 9485 (1998)) and magnetic (see Lee et al, Solid State Communications vol. 115, p. 467 (2000)) fields permits the conducting-rod-composite material to function in electro-optic devices such as switches, modulators, and amplifiers. Likewise, the known response of nanotube electronic property and conductivity to electric and magnetic fields, to mechanical strains (Hertel et al., J. Phys. Chem. B, vol. 102, p. 910 (1998)) and to chemical adsorption on their surfaces (see Jing-Kong et al., Science, vol. 287 p. 622 (2000)) combined with the strong optical response of the composite material permits fabrication of optically-interrogated electrical, mechanical, and chemical sensors.

The nanotube conducting-rod composite materials comprising SWNT in a solid matrix are also electro-strictive, magneto-strictive and chemi-strictive which is to say that they change their physical dimensions in response to electric fields, magnetic fields, and chemisorption of atoms and molecules on their surfaces. This property permits their use as sensors and transducers in all the same ways as are known in the arts of other electro- and magneto-strictive materials as sensors and

electro-mechanical transducers, and admits chemically-sensitive transduction as well. In some embodiments the dimensional change is more effective when an electromagnetic field is applied to the material in conjunction with the electric, magnetic, or chemical influence that initiates the dimensional change.

5 In all the above applications, the response of the material is made anisotropic when the nanotube elements of the material possess a collective net orientation in one direction. An appropriate choice of this orientation is used to enhance or tailor the response of a device to a particular purpose. For instance, the dielectric constant of a material of oriented nanotube segments will be enhanced for electric fields parallel to the mean direction of the constituent nanotube orientation. The mechanical  
10 electrostrictive response, depends on the elastic properties of the insulating matrix and the relative orientation of the applied electric field and net orientation of the constituent SWNT.

#### **Polymer coating of SWNTs and small ropes of SWNTs**

According to one embodiment of the present invention, nanotubes are solubilized or suspended, primarily as individual tubes, in a liquid by associating them robustly with linear polymers  
15 compatible with the liquid used. (If, for example, the liquid is water, suitable polymers include, for example, polyvinyl pyrrolidone and polystyrene sulfonate.) This association is characterized by tight, relatively uniform association of the polymers with the sides of the nanotubes. This association of polymers with the sides of the nanotubes wraps the tubes in a way that inhibits electrical and physical contact between the individual tubes. The suspension or solution thus created provides an example of  
20 a novel dielectric material wherein the SWNT are mobile and do not agglomerate. When the wrapped nanotubes are removed from solution, the polymer wrapping remains, and the tubes form an aggregate in which the individual tubes are substantially electrically-isolated from one another. The material thus formed represents a "conducting rod composite" as described above.

In another embodiment of this invention, the polymeric wrappings around the tubes are cross-  
25 linked by introduction of a linking agent, forming a different material in which individual, electrically-isolated SWNT are permanently suspended in a solid cross-linked polymeric matrix.

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

Various features and objects of the invention will be best appreciated with reference to a detailed description of specific embodiments of the invention, which follows, when read in conjunction  
30 with the accompanying figures, wherein:

**Fig. 1** is a schematic view of a single-wall carbon nanotube – one carbon atom resides at each line intersection in the figure. Depending on the production parameters, the nanotube diameter ranges from about 0.6 to about 1.6 nanometers, and the normal tube segment lengths range between 30 and 3000 nanometers.

35 **Figs. 2A-2C** show schematically how polyvinyl pyrrolidone (PVP) conforms to the SWNT, forming a wrapping that electrically isolates one tube from another. In particular, these figures show possible wrapping arrangements of polyvinyl pyrrolidone (PVP) on an (8,8) SWNT. A double helix (Fig. 2A), a triple helix (Fig. 2B), and an internal-rotation induced switch-back (Fig. 2C) are shown.

Figs. 3A-3D show tapping-mode atomic force micrograph (AFM) images of PVP-SWNTs on a functionalized substrate. A 5  $\mu\text{m}$ -wide height image (Fig. 3A) and amplitude image (Fig. 3B), and a 1  $\mu\text{m}$ -wide expanded height image (Fig. 3C) and amplitude image (Fig. 3D) are shown. The measured feature heights are consistent with individual tubes wrapped with one layer of PVP.

5 Figs. 4A-4B show typical filter cake formed by filtering un-wrapped SWNTs from organic or surfactant suspension, consisting of large ropes (Fig. 4A), and filter cake formed by filtering PVP-wrapped SWNTs (Fig. 4B). Scale bars are 500 nm. The spaghetti-like structures shown in Fig. 4A form because the strong Van der Waals attraction for the bare tubes cause their aggregation into "ropes". The "wrapping" distances the tubes from one another, essentially eliminating the short-range  
10 Van der Waals attraction, and the tubes do not form ropes. The clear difference in the morphology of these filter cakes demonstrates the effectiveness of isolation of one tube from its neighbors.

Fig. 5 is an optical-micrograph showing birefringent domains of PVP-coated SWNT material as observed between crossed polarizers. Scale bar is 0.04 mm.

15 Fig. 6 is a Scanning-electron-micrograph of a material comprising  $>10^4$  individually-wrapped SWNT where the wrapping polymer has been cross-linked according to one embodiment of the present invention.

Figs. 7A-7C show PVP-SWNT lengths as separated by gel electrophoresis.

#### DETAILED DESCRIPTION OF SPECIFIC EMBODIMENTS OF THE INVENTION

20 In the disclosure that follows, in the interest of clarity, not all features of actual implementations are described. It will of course be appreciated that in the development of any such actual implementation, as in any such project, numerous engineering decisions must be made to achieve the developers' specific objectives, which will vary from one implementation to another. Moreover, attention will necessarily be paid to proper engineering practices for the environment(s) in question. It will be appreciated that such a development effort might be complex and time-consuming,  
25 but would nevertheless be a routine undertaking for those of ordinary skill in the relevant fields.

One aspect of the present invention is a composition that comprises one or more single-wall carbon nanotubes, each of which is coated at least in part with a polymer molecule. Figure 1 illustrates a single wall carbon nanotube (SWNT), and Figures 2A-2C shows three possible arrangements of polymer molecules wrapped around a SWNT. Fig. 2 is illustrative of one possible  
30 means in which the similar sizes of the SWNT and polymer enable an individual polymer molecule to contact an individual SWNT at many points, establishing an effective and intimate contact between the polymer and SWNT. Although the arrangements shown in Figures 2A-2C are regular and symmetrical, it should be understood that the invention also encompasses arrangements in which the polymer is wrapped in a non-regular and/or non-symmetrical manner around a SWNT. In some  
35 embodiments of the invention, the polymer is present as a mono-molecular layer on the SWNT. However, it is also possible to have a thicker layer of polymer present. Likewise, while in some embodiments of the invention the polymer wraps or coats only part of the exterior surface of the SWNT, as shown in Figures 2A-2C, in other embodiments of the invention the SWNT may be completely coated (i.e., encapsulated) by polymer.

A variety of polymers can be used in the present invention. In some embodiments, amphiphilic polymers, such as polymer surfactants, are especially useful. An amphiphilic polymer is one that contains both hydrophobic and hydrophilic segments. Water soluble polymers are preferred in embodiments in which the solvent used to form the composition comprises water. It is also possible to use two or more different polymers to wrap the SWNT. Among the many polymers that can be used in the present invention are polyvinyl pyrrolidone (PVP), polystyrene sulfonate (PSS), poly(1-vinyl pyrrolidone-co-vinyl acetate) (PVP/VA), poly(1-vinyl pyrrolidone-coacrylic acid), poly(1-vinyl pyrrolidone-co-dimethylaminoethyl methacrylate), polyvinyl sulfate, poly(sodium styrene sulfonic acid-co-maleic acid), dextran, dextran sulfate, bovine serum albumin (BSA), poly(methyl methacrylate-co-ethyl acrylate), polyvinyl alcohol, polyethylene glycol, polyallyl amine, and mixtures thereof.

The polymer is not covalently bonded to the SWNT, therefore, the electronic, electrical, thermal, and mechanical properties of the coated single-wall carbon nanotube are substantially the same as those of an uncoated single-wall carbon nanotube. In certain embodiments of the invention, the coated carbon nanotube is prepared by a process that includes dispersing SWNT and polymer in a solvent by a method selected from the group consisting of mixing, sonication, and a combination thereof. In other embodiments of the invention, the coated carbon nanotube is prepared by a process that includes: (a) dispersing SWNT and polymer in a solvent (either simultaneously or sequentially) by a method selected from the group consisting of mixing, sonication, and a combination thereof; and (b) adding salt in a quantity effective to promote wrapping of polymer on the carbon nanotube, whereby polymer becomes wrapped on the exterior of the carbon nanotube. The SWNT can be produced by methods including the laser-oven method (described in U.S. Patent 6,183,714, which is incorporated herein by reference) or the "HiPco" process (described in PCT/US99/25702, which is incorporated herein by reference). Preferably the SWNTs used in the process are substantially free (e.g., contain less than about 5% by weight) amorphous carbon.

The polymer in some embodiments of the invention is suspended in the solvent in step (a), while in other embodiments the polymer is dissolved in the solvent. As mentioned above, when an aqueous solvent is used, preferably the polymer is water-soluble. Optionally, the solvent can also comprise a surfactant that promotes wrapping of polymer on the carbon nanotube, such as sodium dodecyl sulfate (SDS). In some embodiments of the process, the concentration of carbon nanotubes in the solvent in step (a) is between about 0.1 gram/liter to about 5.0 gram/liter, and the concentration of polymer in the solvent in step (a) is between about 1.0 percent and about 5.0 percent by weight. It is often useful to heat the solvent in step (a) to a temperature at least about 40 °C, such as between about 50 °C and about 60 °C, for about 0.1 to about 100 hours, more preferably for about 1 to about 50 hours.

Without being bound by theory, it is believed that the polymer has a greater affinity for the SWNT than for the solvent in which it is dissolved and/or suspended, even in a dilute solution. This affinity promotes wrapping of polymer molecules around SWNTs, and effectively solubilizes the SWNTs.

When the composition comprises a plurality of single-wall carbon nanotubes, each of which is coated at least in part with a polymer molecule, it is possible to align the SWNT by application of an external electrical field, magnetic field, or shear flow field. When this is done, preferably the plurality of carbon nanotubes are substantially aligned along their longitudinal axis (e.g., within 25° of having parallel longitudinal axes). Thus, one particular embodiment of the invention is a composition that comprises a plurality of single-wall nanotubes that are substantially aligned with one another to define a composition that is substantially anisotropic in its electrical, mechanical and thermal characteristics.

In some embodiments of the invention, the plurality of carbon nanotubes form an aggregate (such as a rope or bundle) preferably having an overall diameter less than about 10 nm. It is also possible to cross-link the polymer molecules on two or more adjacent SWNTs, thereby producing a cross-linked composite material. Another option is to place the coated SWNTs in a mass of a second polymer, whereby the coated carbon nanotubes are encapsulated in the second polymer (such as suspended in a polymer matrix). For example, the coated SWNT can be combined with a second polymer and extruded through a die to form a composite material.

Another embodiment of the invention is a method of producing a conducting rod composition of matter. This method comprises: associating a linear polymer with the sidewalls of a plurality of individual single-wall carbon nanotubes; solubilizing said plurality of single-wall carbon nanotubes in a solvent such as water; and removing said single-wall carbon nanotubes along with their associated polymers from said solvent to form an aggregate in which said individual single-wall carbon nanotubes are substantially electrically isolated from one another.

Yet another embodiment of the invention is a method of associating a polymer with the sidewalls of a plurality of individual single-wall carbon nanotubes, comprising: providing a purified single-wall carbon nanotube material substantially free of amorphous carbon; dispersing said single-wall carbon nanotube material in a polymer by a combination of high-shear mixing and ultrasonication; adding salt to bring the solution to a desired concentration of salt by weight; centrifuging the solution; decanting the solution; redispersing the material in water by mechanical agitation; and passing the dispersion through at least one filter. Preferably the salt is an alkali metal salt or an alkaline earth metal salt, such as sodium chloride. Optionally, a high gradient magnetic field (with gradients in excess of 1 Tesla/meter) can be applied to the filtered material to remove ferromagnetic particles. In certain specific embodiments of this method, the method further comprises dispersing said single-wall carbon nanotube material in at least about 1% polystyrene sulfonate, the desired concentration of sodium chloride is at least about 10%, and further comprises centrifuging at least about 60,000 g for at least about 20 minutes.

After the SWNTs have been coated with polymer, it is possible to remove the polymer coating from the nanotubes by contacting them with a solvent having a low surface tension. Suitable polymer removal solvents include chlorinated hydrocarbons such as methylene chloride. The choice of solvent will depend in part on the chemical nature of the polymer present on the SWNTs.

Another embodiment of the invention is a dielectric material comprising a plurality of single-wall carbon nanotubes, wherein each nanotube is coated at least in part with a polymer molecule, and

wherein the coated nanotubes are supported in an electrically-insulating material. Suitable electrically insulating materials in which the coated nanotubes can be suspended include poly(methyl methacrylate), polystyrene, polypropylene, nylon, polycarbonate, polyolefin, polyethylene, polyester, polyimide, polyamide, epoxy, and phenolic resin. In at least some embodiments, this composite dielectric material has anisotropic electrical properties. Preferably the circumferences of the nanotubes in this dielectric material are on average less than one-tenth the average length of the individual polymer molecules.

Another embodiment of the invention is a composition that comprises a bundle of single-wall nanotubes, each nanotube being coated at least in part with a polymer, the nanotubes being substantially aligned along their longitudinal axis. The coated nanotubes form part of a chemical sensor or transducer that responds with a change of electrical and mechanical properties to the presence of specific chemicals.

Yet another embodiment of the invention is a composite dielectric material that comprises a continuous phase of dielectric material and a plurality of SWNT dispersed therein. Each SWNT is electrically isolated from adjacent SWNTs by at least a partial coat of polymer on the exterior surface of the SWNT.

Certain detailed embodiments of the invention are described below.

#### **Example 1: Suspension**

Material is first purified to remove catalyst and amorphous carbon. See "Large-scale purification of single-wall carbon nanotubes: process, product and characterization," A. G. Rinzler, J. Liu, H. Dai, P. Nikolaev, C. B. Huffman, F. J. Rodriguez-Macias, P. J. Boul, A. H. Lu, D. Heymann, D. T. Colbert, R. S. Lee, J. E. Fischer, A. M. Rao, P. C. Eklund, R. E. Smalley, *Applied Physics A*, 67, 29 (1998)) and provisional US patent application 60/268,228, entitled "Purified Single-Wall Carbon Nanotubes" filed Feb. 12, 2001, and provisional US patent 60/284,419, entitled "Method for Purifying Single-Wall Carbon Nanotubes and Composition Thereof," filed April 17, 2001, both of which are incorporated herein by reference in their entirety. The SWNT material is then dispersed in 1% polystyrene sulfonate (PSS) at a concentration of 50 mg/L by a combination of high-shear mixing and sufficient ultrasonication to ensure that primarily individual SWNTs were present. Enough sodium chloride is added to bring the solution to 10% NaCl by weight, and the dispersion is centrifuged (60,000 g, 20 min.), decanted, and re-dispersed in water by mechanical agitation. This series is repeated twice with enough sodium chloride to make 5% NaCl and 3% NaCl solutions, respectively. The resulting dispersion is passed successively through a Whatman filter, then 8  $\mu$ m, 3  $\mu$ m, and 1  $\mu$ m polycarbonate track-etched filters, and finally a high-gradient magnetic field that removes the ferromagnetic catalyst particles remaining in the suspension.

#### **Example 2: Removal of wrapping (optional)**

The PSS-SWNT complexes were dissociated by ultrasonication in concentrated phosphoric acid for 1 hour followed by washing with water. Microprobe analysis of the resulting SWNTs showed a decrease of sulfur content by over two orders of magnitude, to within baseline noise. Similarly, a

suspension of NMR-silent PVP-SWNTs, upon addition of tetrahydrofuran, recovered the PVP NMR spectrum, indicating that the polymer and SWNTs were dissociated.

**Example 3: Formation of a simple solid nanotube-conducting-rod composite material**

PVP-wrapped SWNTs, upon centrifuging in water at 200,000 g for 2 hours, formed a  
5 gelatinous pellet that is ca. 2% SWNTs and 2-4% PVP by weight. Examination of 10-50  $\mu\text{m}$  thick films between crossed polarizers revealed large (ca. 100  $\mu\text{m}$ ), well-defined birefringent domains, suggesting that the material behaved nematicly (Fig. 6). This further shows that the nanotube surface area is uniformly covered by the associated polymer, allowing formation of relatively large aggregates wherein the polymer-wrapped SWNT are substantially aligned with one another. The highly-polarized optical  
10 transmission observed is characteristic of a conducting-rod composite.

**Example 4: Formation of a cross-linked nanotube conducting-rod composite material**

To produce another embodiment of this invention, the following were mixed: 0.1% by total wt. SWNTs, 1% by total wt. PVP (50 kD), an equal amount by wt. of polyallylamine (70 kD), and 1.1 molar equivalents (with respect to PVP) of ethylene dichloride (EDC) (coupling agent). The SWNT were  
15 already wrapped by the PVP/VA (10:1 by wt.) when the polyallylamine was added. Shortly after, the EDC was added. The mixture was vortexed and filtered using a 200 nm PTFE membrane. The resulting "bucky paper" was dried at room temperature for 2 days and examined with a scanning electron microscope, producing the image shown in Fig. 6.

**Example 5: Preparation of polymer-wrapped single-wall nanotubes**

SWNTs were produced by both the laser oven methods (see A.G. Rinzler, J. Liu, H. Dai, P. Nikolaev, C.B. Huffman, F.J. Rodriguezmacias, P.J. Boul, A.H. Lu, D. Heymann, D.T. Colbert, R.S. Lee, J.E. Fischer, A.M. Rao, P.C. Eklund, R.E. Smalley, Appl. Phys. A 67 (1998) ("Rinzler 1998") 29) and HiPco (see P. Nikolaev, M.J. Bronikowski, R.K. Bradley, F. Rohmund, D.T. Colbert, K.A. Smith, R.E. Smalley, Chem. Phys. Lett. 313 (1999) ("Nikolaev 1999") 91). As received, laser-oven SWNT  
20 material (dispersed in toluene) was filtered (Whatman #41) and washed with methanol and then water. The SWNTs were then homogenized with a high-shear mixer (Polyscience X-520) and refiltered repeatedly until the filtrate was clear and colorless. HiPco SWNT material was purified by gas-phase oxidation, hydrochloric acid extraction, and high-temperature annealing.

SWNT material from both sources was dispersed in 1% sodium dodecyl sulfate (SDS) in  
30 water at a concentration of 50 mg/L by a combination of high-shear mixing and sufficient ultrasonication to ensure that primarily individual SWNTs were present, as evaluated by AFM. See J. Liu, M.J. Casavant, M. Cox, D.A. Walters, P. Boul, W. Lu, A.J. Rimberg, K.A. Smith, D.T. Colbert, R.E. Smalley, Chem. Phys. Lett. 303 (1999) 125. Enough polyvinyl pyrrolidone (PVP) was added to the mixture to result in a 1% solution by weight, which was then incubated at 50 °C for 12 hours. The  
35 mixture was passed through a 1  $\mu\text{m}$  track-etched polycarbonate filter. Catalyst particles remaining from the SWNT synthesis were then removed by passing the dispersion through a High Gradient Magnetic Separator (HGMS). Residual SDS and polymer were removed by at least three cycles of high-speed centrifugation (200,000 g, 2 hours), decanting, and redispersion in pure water by

mechanical agitation including mild (ten minutes or less) ultrasonication to produce a stable solution of PVP wrapped SWNTs (PVP-SWNTs) in water, uniformly dispersible up to 1.4 g/L.

**Example 6: Solubilization by Polymer Wrapping**

AFM images of PVP-SWNT supramolecular aggregates adsorbed onto amine-functionalized substrates show SWNT height and length distributions consistent with the notion that most of the complexes consist of a single SWNT associated with at most a monolayer of polymer, and a smaller percentage of ropes consisting of more than one SWNT (Figures 3A-3D). The solutions formed are stable for months, and easily pass through a 1  $\mu$ m track-etched polycarbonate filter membrane. When the material is dried, it is easily redissolved into pure water with minimal ultrasonication, in dramatic contrast to dried non-polymer-wrapped SWNT material in any other solvent system.

Solubility is a measure of an equilibrium between the dissolved phase and the aggregated phase, so one component to increasing solubility could be the destabilization of the solid. The smooth, uniform interaction surface along pristine SWNTs allows a remarkably robust van der Waals interaction between them. The pair-wise interaction potential between parallel SWNTs has recently been determined by a continuum model. See L.A. Girifalco, M. Hodak, R.S. Lee, Phys. Rev. B 62 (2000) 13104. For every nanometer of overlap between two (10,10) tubes, the binding energy is 950 meV. Thus, summed for a typical SWNT length of 100 nm embedded in a rope, the cohesive energy is a staggering 2.9 keV. It might be expected, therefore, that modifications to the SWNTs that disrupt the uniform interactions along their lengths in a hexagonally packed crystal would shift their equilibrium in solvents toward the dissolved phase. Such modifications could be side-wall functionalization, (see P.J. Boul, J. Liu, E.T. Mickelson, C.B. Huffman, L.M. Ericson, I.W. Chiang, K.A. Smith, D.T. Colbert, R.H. Hauge, J.L. Margrave, R.E. Smalley, Chem. Phys. Lett. 310 (1999) ("Boul 1999") 367) end-cap functionalization, (see J. Chen, M.A. Hamon, H. Hu, Y.S. Chen, A.M. Rao, P.C. Eklund, R.C. Haddon, Science 282 (1998) 95) or wrapping the SWNTs with a polymer. In filtered papers made from non-wrapped SWNT dispersions (Figure 4A), the tubes self-assemble into mats of tangled, seemingly endless ropes, wherein a majority of the tubes are in direct van der Waals contact with other SWNTs along their entire length. See Rinzler 1998, 29. Filtered papers of PVP-SWNTs, on the other hand, exhibit no such large-scale structure (Figures 4B).

**Example 7: Robust Association between polymer and SWNTs**

A modified flow field-flow fractionation (FFF) technique was used to test the stability of polymer wrapping. 20  $\mu$ L of a dissolved 0.46 g/L PVP-SWNTs were injected into the Flow FFF Instrument (Universal Fractionator Model F-1000, FFFractionation, LLC) with zero crossflow and a channel flow of water with 0.02% sodium azide (a bactericide). When the sample entered the cross-flow region, the channel flow was halted and a cross-flow of 0.5 mL/min. was initiated, pinning the sample against the accumulation membrane. The sample was washed by the cross-flow against the membrane for 40 min., after which the cross-flow was halted and the channel flow reinitiated, allowing the sample to be collected when it exited the Flow FFF. The final samples were compared to the starting material by tapping-mode AFM, and found to be unchanged within experimental error. The observed length distribution was  $137 \pm 130$  nm before and  $167 \pm 138$  nm after. In all cases, a large



percentage of the tubes had heights consistent with known individual nanotube heights plus a monolayer coating of the polymer. No nanotubes were observed surviving this treatment in a control experiment where the SWNTs were suspended by Triton X-100.

During the sample preparation, the Nuclear Magnetic Resonance (NMR) signal for the polymer disappeared after several centrifugation/decanting/resuspension cycles, although by absorption spectroscopy there is still a significant amount of polymer left in solution. We conclude that the polymer that is tightly associated with the SWNTs is dramatically broadened by some combination of factors, including inhomogeneities in the local magnetic field induced by the diameter and helicity dependent diamagnetism of the SWNTs themselves (i.e., an 'antenna' effect), the slow motion of such large objects in solution preventing rotational averaging, and the at least partial alignment of the SWNTs in the magnetic field. See J. Hone, M.C. Laguno, N.M. Nemes, A.T. Johnson, J.E. Fischer, D.A. Walters, M.J. Casavant, J. Schmidt, R.E. Smalley, Appl. Phys. Lett. 77 (2000) 666 and B.W. Smith, Z. Benes, D.E. Luzzi, J.E. Fischer, D.A. Walters, M.J. Casavant, J. Schmidt, R.E. Smalley, Appl. Phys. Lett. 77 (2000) 663. Therefore, NMR spectroscopy quantifies the amount of free polymer in solution, and by subtraction from the total amount of polymer as determined by absorption spectroscopy, the amount of polymer that is associated with the SWNTs is quantified. These NMR measurements are possible due to recent developments in the purification techniques for SWNTs, particularly with respect to removing residual metal catalyst from the samples.

Taken together, these results are strong evidence that the polymer and SWNT comprise a single entity that can be manipulated as a whole, rather than solubilization by a dynamic equilibrium of the supramolecular association.

#### **Example 8: Tight, uniform wrapping**

The individual PVP-SWNTs appear by AFM to be of uniform diameter along their lengths with heights consistent with monolayer coverage of the SWNTs, supporting the interpretation that the polymer is uniformly wrapped around the tubes rather than associated with the side-walls at various points as random coils.

PVP-SWNTs, after centrifuging in water at 200,000 g for 2 hours, formed a gelatinous pellet that was found to be ca. 2% SWNTs and 2% PVP by weight. Examination of 10-50  $\mu\text{m}$  thick films between crossed polarizers revealed large (ca. 100  $\mu\text{m}$ ), well-defined birefringent domains, suggesting that the material behaves nematicly (Figure 5). This further supports the interpretation that the nanotube surface area is uniformly covered by the associated polymer. The system is almost certainly a nematic solid, and may require the traditional addition of highly entropic side chains to transform the material into a true liquid crystal.

At maximum coverage, the 40 kD PVP:SWNT ratio by weight was found to be 5:8 for HiPco material and 1:1 for laser oven material. 360 kD PVP was found to associate with the SWNTs at higher ratios, 1.7:1 and 2:1 for laser-oven material and HiPco material, respectively. It is likely that these longer polymers are more likely to entangle during the wrapping process, thus associating more unwrapped polymer for a given surface-area coverage. Furthermore, assuming the same polymer/SWNT surface area ratio as observed in the 40 kD case, which corresponds to the simple

case in which the polymer executes a helical wrapping of the tube, covering the tube with a monolayer of polymer (such as the illustrated forms in Figs. 2A and 2B), a single strand of 360 kD PVP would more than cover the entire surface area of a single SWNT of the typical observed length.

**Example 9: Wrapping: A General Phenomenon**

5 SWNTs can also be successfully solubilized by wrapping with other polymers, including polystyrene sulfonate (PSS), poly(1-vinyl pyrrolidone-co-vinyl acetate) (PVP/VA), poly(1-vinyl pyrrolidone-coacrylic acid), poly(1-vinyl pyrrolidone-co-dimethylaminoethyl methacrylate), polyvinyl sulfate, poly(sodium styrene sulfonic acid-co-maleic acid), dextran, dextran sulfate, and bovine serum albumin (BSA). Although polymers including poly(methyl methacrylate-co-ethyl acrylate), polyvinyl alcohol, polyethylene glycol, and polyallyl amine were initially unsuccessful in solubilizing SWNT by wrapping, subsequent tests indicated that they can successfully solubilize SWNT by wrapping.

10 Although not to be bound by theory, a rational interpretation of the examples indicates that the wrapping of the SWNTs by water-soluble polymers is a general phenomenon, driven largely by a thermodynamic drive to eliminate the hydrophobic interface between the tubes and their aqueous medium. Within this interpretation, changing the solvent system to remove the strong hydrophobic thermodynamic penalty should induce the PVP-SWNT complexes to dissociate, and in fact NMR-silent PVP-SWNTs, upon addition of tetrahydrofuran, recovers the PVP NMR spectrum.

15 This can be understood by estimating the dominant thermodynamic factors in wrapping an idealized water-soluble polymer around a SWNT. Due to the free-rotation about the backbone bonds in the polymers studied here, they generally form random coils in solution. The entropic cost of forcing a linear polymer into a wrapping conformation around a nanotube can be estimated as being at most that of restricting each polymer backbone bond to one of its three rotational minima, which is simply where  $n$  is the number of backbone carbon atoms. In an effort to evaluate the generality of a proposed thermodynamic driving force, we will consider the isoenergetic case, recognizing that polymers with favorable enthalpic interactions can likely be chosen (e.g., PVP is a close polymer analog to *n*-methyl pyrrolidone (NMP), an excellent solvent for laser-oven SWNTs. See K.D. Ausman, R. Piner, O. Lourie, R.S. Ruoff, M. Korobov, J. Phys. Chem. B 104 (2000) 8911. From the observed 40 kD PVP:SWNT mass ratio and assuming a 1.0 nm diameter tube. See Nikolaev (1999), 91. We find an average of 8.1 monomer units per nanometer of HiPco SWNT, resulting in an entropic penalty of ca. 25 56 J/mol K. Assuming a negligible enthalpic contribution to the free energy as discussed above, this gives a maximum free energy penalty for polymer conformational restriction at 25 °C of 17 kJ/mol per nm of SWNT wrapped.

30 Offsetting this effect is the loss of hydrophobic surface achieved by shielding the nanotube from the water in which it is immersed, which for SWNTs can be estimated from the surface tension of the corresponding hydrophobic cavity. For a cavity the size of a 1.0 nm diameter nanotube, this is ca. 136 kJ/mol for each nm of SWNT length at room temperature. Clearly, the free energy cost of forcing the polymeric wrapping into a regular wrapping arrangement is significantly smaller than the gain achieved by overcoming the hydrophobic penalty between the SWNTs and their surrounding water.

Of the successful wrapping polymers, the ionic polymers provide an instructive contrast to the nonionic case described. PSS, for example, solubilized SWNT material up to 4.1 g/L. However, during the wrapping procedure, the higher ionic strength of the solutions induced aggregation during the wrapping step as a consequence of electric double-layer solubilization, requiring that the dispersion and association steps take place simultaneously. This double-layer effect could be used to good advantage, however, in the purification step through intentional salting-out of the ionic-polymer wrapped SWNTs, significantly reducing the required centrifugation forces. The absorption spectroscopy/NMR technique for quantifying the amount of wrapping polymer present was verified in this case by electron microprobe analysis for sulfur content. PSS-SWNTs had less-reproducible polymer to SWNT mass ratios than did PVP-SWNTs, ranging up to 1:2 and 2:1 for laser oven and HiPco materials, respectively. This irreducibility is a result of a lower binding of polymer to the tubes, as evinced by the continued removal of polymer by repeated centrifugation/decanting/resuspension steps. Removing the PSS wrapping by ultrasonication in concentrated phosphoric acid for 1 hour followed by washing with water reduced the sulfur microprobe signal by over two orders of magnitude, to within baseline noise.

#### Example 10: Molecular Picture

From the key observations described, solubilization with near-monolayer coverage of tightly-associated polymer around individual SWNTs, a molecular-level picture of the association geometry is suggested: helical wrapping. A single tight coil, however, would necessarily introduce significant bond-angle strain in the polymer backbone, enough to offset the thermodynamic drive for wrapping described above. Multi-helical wrapping (Figures 2A-2C), on the other hand, allows high surface-area coverage with low backbone strain, where, at least locally, multiple strands of polymer coil around the SWNT at close to their nascent backbone curvature. Given such a picture, it is natural to expect that successive strands of polymer wrapping would have different binding constants, particularly when the polymer strand is charged as in the case of PSS, explaining the lower binding of PSS relative to PVP.

#### Example 11: Biologically relevant conditions

PSS-SWNTs are largely solubilized by the electric double-layer effect, making solution stability sensitive to its ionic strength. HiPco PSS-SWNT solutions at a concentration of 11 mg/L of tubes salt out at NaCl concentrations of  $20 \pm 5$  mM, and  $\text{MgCl}_2$  concentrations of  $2 \pm 1$  mM. PVP-SWNTs also salt out, albeit at higher ionic strengths ( $135 \pm 20$  mM NaCl and  $10 \pm 2$   $\text{MgCl}_2$  for 11 mg/L of tubes), suggesting that these tubes also carry a charge, similar to the dimethylformamide and dimethylsulfoxide dispersions of SWNTs previously reported. See Boul (1999), 367. The solution stability of PVP-SWNTs at these high ionic strengths raises the possibility that a similar system will be solubilized in biologically-relevant conditions. BSA and dextrans also stably solubilized SWNTs at high ionic strengths, more directly making the connection to the biological world.

#### Example 12: Applications

The solubilization of SWNTs by the procedures described here opens up the possibility of functionalization chemistry, both on the tubes themselves and on the wrapping polymer, and solution-phase separations. For example, purification of the SWNTs from any residual catalytic material can be

efficiently performed by high gradient magnetic separation. Also, PVP-SWNTs can be length-fractionated by gel electrophoresis. Fractions, as measured from a maximum migration of 18 cm along a 0.5% agarose gel in a glycine/SDS buffer and subjected to 100 V for five hours, were investigated by AFM to reveal significant separation by length (Figure 7).

5       Single-walled carbon nanotubes have been reversibly solubilized in water by wrapping them with a variety of linear polymers. It was demonstrated that the association between the polymer and the SWNT is robust, not dependent upon the presence of excess polymer in solution, and is uniform along the sides of the tubes. A general thermodynamic driving force for such wrapping in an aqueous environment has been identified. This solubilization provides a route to more precise manipulation, purification, fractionation, and functionalization than was before possible, as well as allowing SWNTs to be introduced to biologically-relevant systems.

**Example 13: High Dielectric Constant material**

15       A suspension of PVP-wrapped nanotubes was prepared according to the procedure of example 5. After the sample was completely reacted, it is dried for further analysis. This was done by using the aspirator filtration apparatus with a 100 nm or less pore size track-etched polycarbonate filtration membrane. The SWNTs were captured on the filter membrane and form a bucky paper. This bucky paper was allowed to air-dry to remove as much of the liquid as possible.

20       The bucky paper prepared in this way with dimensions approximately 0.8 cm by 1.2 cm and a thickness of 0.012 cm was clamped securely between two lead/indium foil electrodes. The electrodes were connected to a Hewlett Packard 4284A (20 Hz-1MHz) Precision LCR Meter. This measurement indicated a dielectric constant of ranging between 600 and 800 over the frequency range of 1 megahertz to 500 hertz with an applied RMS ac voltage of 200 mV applied between the foil electrodes.

25       From the foregoing detailed description of specific embodiments of the invention, it should be apparent that methods and apparatuses involving materials containing single-wall carbon nanotubes and non-covalently derivatized single-wall carbon nanotubes have been disclosed. Although specific embodiments and implementation alternatives have been disclosed herein, this has been done solely for the purposes of describing the invention in its various aspects, and is not intended to be limiting with the scope of the invention as defined in the claims accompanying this application and/or a non-provisional counterpart to this application. It is contemplated that various substitutions, alterations, and or modifications, including but not limited to those which may have been discussed or suggested herein, may be made to the disclosed embodiment(s) without departing from the spirit and scope of the invention.

30

## CLAIMS:

1. A composition of matter comprising a single-wall carbon nanotube coated at least in part with at least one polymer molecule.

2. A composition of matter in accordance with claim 1, wherein the single-wall carbon nanotube is contacted by at least one polymer molecule at a plurality of points.

3. A composition of matter in accordance with claim 1, wherein the polymer is an amphiphilic polymer.

4. A composition of matter in accordance with claim 1, wherein the polymer is water soluble.

5. A composition of matter in accordance with claim 1, wherein the polymer is a surfactant.

6. A composition of matter in accordance with claim 1, wherein the electrical, mechanical, and thermal properties of said single-wall carbon nanotube are substantially the same as those of the single-wall carbon nanotube when uncoated.

7. A composition of matter in accordance with claim 1, wherein the carbon nanotube is coated with at least two different polymers.

8. A composition of matter in accordance with claim 1, wherein the polymer is a copolymer.

9. A composition of matter in accordance with claim 1, wherein said polymer is selected from the group consisting of: polyvinyl pyrrolidone (PVP), polystyrene sulfonate (PSS), poly(1-vinyl pyrrolidone-co-vinyl acetate) (PVP/VA), poly(1-vinyl pyrrolidone-coacrylic acid), poly(1-vinyl pyrrolidone-co-dimethylaminoethyl methacrylate), polyvinyl sulfate, poly(sodium styrene sulfonic acid-co-maleic acid), dextran, dextran sulfate, bovine serum albumin (BSA), poly(methyl methacrylate-co-ethyl acrylate), polyvinyl alcohol, polyethylene glycol, polyallyl amine and mixtures thereof.

10. A composition of matter in accordance with claim 1, wherein the coated carbon nanotube is prepared by a process comprising dispersing a single-wall carbon nanotube and a polymer in a solvent by a method selected from the group consisting of mixing, sonication, heating and combinations thereof.

11. A composition of matter in accordance with claim 10, wherein the coated carbon nanotube is prepared by a process further comprising adding salt in a quantity effective to promote wrapping of polymer on the single-wall carbon nanotube, whereby polymer becomes wrapped on the exterior of the carbon nanotube.

12. A composition of matter in accordance with claim 10, wherein the single-wall carbon nanotube is substantially free of amorphous carbon.

13. A composition of matter in accordance with claim 10, wherein the polymer and the single-wall carbon nanotube are added to the solvent sequentially.

14. A composition of matter in accordance with claim 10, wherein the polymer and the single-wall carbon nanotube are added to the solvent simultaneously.

15. A composition of matter in accordance with claim 10, wherein the solvent comprises water and the polymer is water-soluble.

16. A composition of matter in accordance with claim 15, wherein the solvent further comprises a surfactant that promotes wrapping of polymer on the carbon nanotube.

17. A composition of matter in accordance with claim 10, wherein the concentration of the single-wall carbon nanotubes in the solvent is between about 0.1 gram/liter and about 5 gram/liter.

18. A composition of matter in accordance with claim 10, wherein the concentration of the polymer in the solvent is between about 1.0 percent and about 5.0 percent by weight.

19. A composition of matter in accordance with claim 10, wherein the solvent is heated to a temperature at least about 40 °C.

20. A composition of matter in accordance with claim 10, wherein the solvent is heated in step (a) to a temperature between about 50 °C and about 60 °C.

21. A composition of matter in accordance with claim 10, wherein the solvent is heated between about 0.1 hours and about 100 hours.

22. A composition of matter in accordance with claim 10, wherein the solvent is heated between about 1 hour and about 50 hours.

23. A composition of matter in accordance with claim 1, wherein the coated carbon nanotube is encapsulated in a second polymer.

24. A composition of matter in accordance with claim 1, wherein the coated carbon nanotube is in a polymer matrix.

25. A composition of matter in accordance with claim 24, wherein the polymer matrix is selected from the group consisting of poly(methyl methacrylate), polystyrene, polypropylene, nylon, polycarbonate, polyolefin, polyethylene, polyester, polyimide, polyamide, epoxy, phenolic resin and combinations thereof.

26. A composition of matter comprising a plurality of single-wall carbon nanotubes each coated at least in part with a polymer molecule.

27. A composition of matter in accordance with claim 26, wherein each single-wall carbon nanotube of the plurality of single-wall carbon nanotubes is contacted by at least one polymer molecule at a plurality of points.

28. A composition of matter in accordance with claim 26, wherein the plurality of single-wall carbon nanotubes are substantially aligned along their longitudinal axes.

29. A composition of matter in accordance with claim 26, wherein the plurality of coated single-wall carbon nanotubes form an aggregate having an overall diameter less than about 10 nm.

30. A composition of matter in accordance with claim 26, wherein a first polymer molecule that coats a first single-wall carbon nanotube of the plurality of single-wall carbon nanotubes is cross-linked with a second polymer molecule that coats a second single-wall carbon nanotube of the plurality of single-wall carbon nanotubes.

31. A composition of matter in accordance with claim 26, wherein a first polymer molecule that coats a first single-wall carbon nanotube of the plurality of single-wall carbon nanotubes is cross-

linked with a second polymer molecule that coats the first single-wall carbon nanotube of the plurality of single-wall carbon nanotubes.

32. A composition of matter in accordance with claim 26, wherein a first portion of a first polymer molecule that coats a first single-wall carbon nanotube of the plurality of single-wall carbon nanotubes is cross-linked with a second portion of the portion of the first polymer molecule.

33. A composition of matter in accordance with claim 26, wherein the plurality of coated single-wall carbon nanotubes are encapsulated in a second polymer.

34. A composition of matter in accordance with claim 26, wherein the plurality of coated single-wall carbon nanotubes are suspended in a polymer matrix.

35. A composition of matter in accordance with claim 26, wherein the polymer matrix is selected from the group consisting of poly(methyl methacrylate), polystyrene, polypropylene, nylon, polycarbonate, polyolefin, polyethylene, polyester, polyimide, polyamide, epoxy, phenolic resin and combinations thereof.

36. A composition of matter comprising an aggregate of uncoated single-wall carbon nanotubes wrapped with one or more polymers.

37. A composition of matter in accordance with claim 36, wherein the aggregate of uncoated single-wall carbon nanotubes comprises a rope of single-wall carbon nanotubes in which the nanotubes are substantially aligned along their longitudinal axes.

38. A composition of matter in accordance with claim 36, wherein the aggregate of uncoated single-wall carbon nanotubes comprises a bundle of single-wall carbon nanotubes in which the nanotubes are substantially aligned along their longitudinal axes.

39. A composition of matter in accordance with claim 36, wherein the polymer is an amphiphilic polymer.

40. A composition of matter in accordance with claim 36, wherein the polymer is water soluble

41. A composition of matter in accordance with claim 36, wherein said polymer is attached to the aggregate of the single-wall carbon nanotubes by non-covalent forces.

42. A composition of matter in accordance with claim 36, wherein the aggregate of single-wall carbon nanotubes is coated with at least two different polymers.

43. A composition of matter in accordance with claim 36, wherein the aggregate of single-wall carbon nanotubes is coated with a co-polymer.

44. A composition of matter in accordance with claim 36, wherein the polymer is selected from the group consisting of: polyvinyl pyrrolidone (PVP), polystyrene sulfonate (PSS), poly(1-vinyl pyrrolidone-co-vinyl acetate) (PVP/VA), poly(1-vinyl pyrrolidone-coacrylic acid), poly(1-vinyl pyrrolidone-co-dimethylaminoethyl methacrylate), polyvinyl sulfate, poly(sodium styrene sulfonic acid-co-maleic acid), dextran, dextran sulfate, bovine serum albumin (BSA), poly(methyl methacrylate-co-ethyl acrylate), polyvinyl alcohol, polyethylene glycol, and polyallyl amine.

45. A composition of matter in accordance with claim 36, wherein the polymer-coated aggregate of single-wall carbon nanotubes is prepared by a process comprising dispersing the

uncoated aggregates of single-wall carbon nanotubes and a polymer in a solvent by a method selected from the group consisting of mixing, sonication, heating and combinations thereof.

46. A composition of matter in accordance with claim 45, wherein the coated carbon nanotube aggregates are prepared by a process further comprising adding salt in a quantity effective to promote wrapping of polymer on the aggregate of single-wall carbon nanotubes, whereby polymer becomes wrapped on the exterior of the aggregate of single-wall carbon nanotubes.

47. A composition of matter in accordance with claim 45, wherein the aggregate of single-wall carbon nanotubes are substantially free of amorphous carbon.

48. A composition of matter in accordance with claim 45, wherein the polymer is suspended in the solvent.

49. A composition of matter in accordance with claim 45, wherein the polymer and the uncoated aggregate of single-wall carbon nanotubes are added to the solvent sequentially.

50. A composition of matter in accordance with claim 45, wherein the polymer and the uncoated single-wall carbon nanotubes are added to the solvent simultaneously.

51. A composition of matter in accordance with claim 45, wherein the solvent is aqueous and the polymer is water-soluble.

52. A composition of matter in accordance with claim 51, wherein the solvent further comprises a surfactant that promotes wrapping of polymer on the aggregate of single-wall carbon nanotubes.

53. A composition of matter in accordance with claim 45, wherein the concentration of the aggregate of uncoated single-wall carbon nanotubes in the solvent is between about 0.1 grams/liter and about 5 grams/liter.

54. A composition of matter in accordance with claim 45, wherein the concentration of polymer in the solvent is between about 1.0 percent and about 5.0 percent by weight.

55. A composition of matter in accordance with claim 45, wherein the solvent is heated to a temperature at least about 40 °C.

56. A composition of matter in accordance with claim 45, wherein the solvent is heated to a temperature of between about 50 °C and about 60 °C.

57. A composition of matter in accordance with claim 45, wherein the solvent is heated between about 0.1 hours and about 100 hours.

58. A composition of matter in accordance with claim 45, wherein the solvent is heated between about 1 hour and about 50 hours.

59. A composition of matter in accordance with claim 45, wherein the coated aggregate of single-wall carbon nanotubes comprises carbon nanotubes which are substantially aligned along their longitudinal axes.

60. A composition of matter in accordance with claim 45, wherein a first polymer that coats the aggregate of the uncoated single-wall carbon nanotubes is cross-linked with a second polymer that coats a second aggregate of uncoated single-wall carbon nanotubes.



61. A composition of matter in accordance with claim 45, wherein a first polymer that coats the aggregate of the uncoated single-wall carbon nanotubes is cross-linked with a second polymer that coats the aggregate of the uncoated single-wall carbon nanotubes.

62. A composition of matter in accordance with claim 45, wherein a first portion of a first polymer that coats the aggregate of the uncoated single-wall carbon nanotubes is cross-linked with a second portion of the first polymer.

63. A composition of matter in accordance with claim 45, wherein the polymer-coated single-wall carbon nanotube aggregate is suspended in a polymer matrix.

64. A composition of matter in accordance with claim 63, wherein the polymer matrix comprises a material selected from the group consisting of poly(methyl methacrylate), polystyrene, polypropylene, nylon, polycarbonate, polyolefin, polyethylene, polyester, polyimide, polyamide, epoxy, phenolic resin and combinations thereof.

65. A composition of matter comprising a plurality of aggregates of single-wall carbon nanotubes wherein at least some aggregate of the plurality of aggregates is coated at least in part with at least one polymer molecule.

66. An electrically-conducting composite comprising substantially aligned polymer-coated aggregates of uncoated single-wall nanotubes, wherein said electrically-conducting composite has a length of at least one thousand nanometers.

67. A method of making a conducting rod composite material comprising coating a plurality of individual single-wall carbon nanotubes at least in part with one or more polymer molecules, wherein the individual single-wall carbon nanotubes are substantially electrically isolated from one another.

68. An electrically-conducting composite having a length of at least one thousand nanometers comprising substantially aligned polymer-coated aggregates of uncoated single-wall nanotubes.

69. A method of making a conducting rod composite material comprising:

(a) associating a polymer with the sidewalls of a plurality of individual single-wall carbon nanotubes;

(b) solubilizing said plurality of single-wall carbon nanotubes in a solvent;

and

(c) removing said single-wall carbon nanotubes from said solvent to form an aggregate in which said individual single-wall carbon nanotubes are substantially electrically isolated from one another.

70. A method of associating a polymer with the sidewalls of a plurality of individual single-wall carbon nanotubes, comprising:

(a) providing a purified single-wall carbon nanotube material substantially free of amorphous carbon;

(b) dispersing said single-wall carbon nanotube material in the polymer by a combination of high-shear mixing and ultrasonication;

- (c) adding salt to bring the solution to a desired concentration of salt by weight;
- (d) centrifuging the solution;
- (e) decanting the solution;
- 5 (f) redispersing the material in water by mechanical agitation; and
- (g) passing the material through at least one filter.

71. The method in accordance with claim 70, wherein the salt is selected from the group consisting of an alkali metal salt and an alkaline earth metal salt.

72. The method in accordance with claim 71, wherein the salt is sodium chloride.

10 73. The method in accordance with claim 70, further comprising applying a high-gradient magnetic field to the material to remove ferromagnetic particles.

74. The method in accordance with claim 70, wherein said dispersing step (b) comprises dispersing said single-wall carbon nanotube material in at least about 1% polystyrene sulfonate in water.

15 75. The method in accordance with claim 72, wherein the concentration of sodium chloride is at least about 10%.

76. The method in accordance with claim 70, wherein said centrifuging step (d) comprises centrifuging at least about 60,000 g for at least about 20 minutes.

20 77. The method in accordance with claim 70, wherein the polymer is an amphiphilic polymer

78. A method in accordance with claim 70, wherein the polymer is selected from the group consisting of: polyvinyl pyrrolidone (PVP), polystyrene sulfonate (PSS), poly(1-vinyl pyrrolidone-co-vinyl acetate) (PVP/VA), poly(1-vinyl pyrrolidone-coacrylic acid), poly(1-vinyl pyrrolidone-co-dimethylaminoethyl methacrylate), polyvinyl sulfate, poly(sodium styrene sulfonic acid-co-maleic acid), dextran, dextran sulfate, bovine serum albumin (BSA), poly(methyl methacrylate-co-ethyl acrylate), polyvinyl alcohol, polyethylene glycol, and polyallyl amine.

25 79. The method in accordance with claim 70, wherein the single-wall carbon nanotubes are coated with at least two different polymers.

30 80. A method for making polymer-coated single-wall carbon nanotubes comprising dispersing single-wall carbon nanotubes and a polymer in a solvent by a method selected from the group consisting of mixing, sonication, heating and combinations thereof.

81. A method in accordance with claim 80, wherein the single-wall carbon nanotubes are substantially free of amorphous carbon.

35 82. A method in accordance with claim 80, wherein the single-wall carbon nanotubes are coated with at least two polymers.

83. A method in accordance with claim 80, wherein the polymer and the plurality of individual single wall carbon nanotubes are added to the solvent sequentially.

84. A method in accordance with claim 80, wherein the polymer and the plurality of individual single-wall carbon nanotubes are added to the solvent simultaneously.

85. A method in accordance with claim 80, wherein the solvent comprises water and the polymer is water-soluble.

86. A method in accordance with claim 80, wherein the solvent further comprises a surfactant.

5 87. A method in accordance with claim 80, wherein the concentration of single-wall carbon nanotubes in the solvent is between about 0.1 grams/liter and about 5 grams/liter.

88. A method in accordance with claim 80, wherein the concentration of polymer in the solvent is between about 1.0 percent and about 5.0 percent by weight.

10 89. A method in accordance with claim 80, wherein the solvent is heated to a temperature at least about 40 °C.

90. A method in accordance with claim 80, wherein the solvent is heated to a temperature of between about 50 °C and about 60 °C.

91. A method in accordance with claim 80, wherein the solvent is heated between about 0.1 hours and about 100 hours.

15 92. A method in accordance with claim 80, wherein the solvent is heated between about 1 hour and about 50 hours.

93. A method in accordance with claim 80, further comprising the step of extruding the polymer-wrapped nanotubes with a second polymer to form an encapsulated nanotube-polymer composite.

20 94. A method in accordance with claim 80, further comprising the step of removing the polymer coat from the nanotubes by contacting the coated nanotubes with a solvent having a low surface tension.

95. A method in accordance with claim 94, wherein the solvent comprises a chlorinated hydrocarbon.

25 96. A method in accordance with claim 80, further comprising the step of aligning the nanotubes by application of an external field selected from the group consisting of an electrical field, a magnetic field and a shear flow field.

30 97. A method for making polymer-coated aggregates of single-wall carbon nanotubes comprising dispersing aggregates of single-wall carbon nanotubes and a polymer in a solvent by a method selected from the group consisting of mixing, sonication, heating and combinations thereof.

98. A method in accordance with claim 97, wherein the aggregates of single-wall carbon nanotubes comprises ropes of single-wall carbon nanotubes which are substantially aligned along their longitudinal axes.

35 99. A method in accordance with claim 97, wherein the aggregates of single-wall carbon nanotubes comprises bundles of single-wall carbon nanotubes which are substantially aligned along their longitudinal axes.

100. A method in accordance with claim 97, wherein the aggregates of single-wall carbon nanotubes are coated with at least two different polymers.

101. A method in accordance with claim 97, wherein the single-wall carbon nanotubes in the aggregates are substantially free of amorphous carbon.

102. A method in accordance with claim 97, wherein the polymer and the aggregates of single-wall carbon nanotubes are added to the solvent sequentially.

5 103. A method in accordance with claim 97, wherein the polymer and the aggregates of single-wall carbon nanotubes are added to the solvent simultaneously.

104. A method in accordance with claim 97, wherein the solvent comprises water and the polymer is water-soluble.

10 105. A method in accordance with claim 97, wherein the solvent further comprises a surfactant.

106. A method in accordance with claim 97, wherein the concentration of the aggregates of single-wall carbon nanotubes in the solvent is between about 0.1 gram/liter and about 5 gram/liter.

107. A method in accordance with claim 97, wherein the concentration of the polymer in the solvent is between about 1.0 percent and about 5.0 percent by weight.

15 108. A method in accordance with claim 97, wherein the solvent is heated to a temperature at least about 40 °C.

109. A method in accordance with claim 97, wherein the solvent is heated to a temperature of between about 50 °C and about 60 °C.

20 110. A method in accordance with claim 97, wherein the solvent is heated between about 0.1 hours and about 100 hours.

111. A method in accordance with claim 97, wherein the solvent is heated between about 1 hour and about 50 hours.

25 112. A method in accordance with claim 97, further comprising the step of extruding the polymer-wrapped aggregates of single-wall carbon nanotubes with a second polymer to form a composite of single-wall carbon nanotube aggregates.

113. A method in accordance with claim 97, further comprising the step of removing the polymer coat from the polymer-coated aggregates of the single-wall carbon nanotubes by contacting the polymer-coated aggregates of single-wall carbon nanotubes with a solvent having a low surface tension.

30 114. A method in accordance with claim 113, wherein the solvent comprises a chlorinated hydrocarbon.

115. A method in accordance with claim 97, further comprising the step of aligning the polymer-wrapped aggregates of single-wall carbon nanotubes by application of an external field selected from the group consisting of an electrical field, magnetic field, and shear flow field.

35 116. A dielectric material comprising a plurality of single-wall carbon nanotubes coated at least in part with a polymer molecule, wherein the polymer-coated single-wall carbon nanotubes are electrically-isolated from one another.

117. A dielectric material in accordance with claim 116, wherein the material has anisotropic electrical properties.

118. A dielectric material in accordance with claim 116, wherein the single-wall carbon nanotubes are smaller on average in their circumference than the average length of the individual polymer molecules.

5 119. A structure comprising a dielectric material in accordance with claim 116, wherein the structure is selected from the group consisting of capacitor dielectrics, circuit board materials, waveguide materials, optical index-matching materials, electromagnetic radiation absorbing materials, electromagnetic radiation re-directing materials, optoelectronic materials, antenna arrays, materials for suspending antennas, electrically-loading antennas, and supports of antenna arrays.

10 120. A dielectric material in accordance with claim 116, wherein the polymer-coated single-wall carbon nanotubes are embedded in a polymer matrix.

121. A dielectric material in accordance with claim 120, wherein the polymer matrix is an electrically-insulating polymer material.

122. A dielectric material in accordance with claim 120, wherein the dielectric material has anisotropic electrical properties.

15 123. A dielectric material in accordance with claim 116, wherein a dielectric constant of said dielectric material is at least about 10.

124. A dielectric material in accordance with claim 116, wherein a dielectric constant of said dielectric material is at least about 100.

20 125. A dielectric material in accordance with claim 116, wherein a dielectric constant of said dielectric material is at least about 500.

126. A dielectric material comprising a plurality of aggregates of single-wall carbon nanotubes coated at least in part with a polymer molecule wherein at least some of the plurality of aggregates of single-wall carbon nanotubes are electrically-isolated from one another.

25 127. A dielectric material in accordance with claim 126, wherein the single-wall carbon nanotube aggregate comprises a rope of single-wall carbon nanotubes in which the nanotubes are substantially aligned along their longitudinal axes.

128. A dielectric material in accordance with claim 126, wherein the single-wall carbon nanotube aggregate comprises a bundle of single-wall carbon nanotubes in which the nanotubes are substantially aligned along their longitudinal axes.

30 129. A dielectric material in accordance with claim 126, wherein the material has anisotropic electrical properties.

130. A dielectric material in accordance with claim 126, wherein the aggregates of single-wall carbon nanotubes are smaller on average in their circumference than the average length of the individual polymer molecules.

35 131. A structure comprising a dielectric material in accordance with claim 126, wherein the structure is selected from the group consisting of capacitor dielectrics, circuit board materials, waveguide materials, optical index-matching materials, electromagnetic radiation absorbing materials, electromagnetic radiation re-directing materials, optoelectronic materials, antenna arrays, materials for suspending antennas, electrically-loading antennas, and supports of antenna arrays.

132. A dielectric material in accordance with claim 126, wherein the polymer-coated aggregates of single-wall carbon nanotubes are embedded in a polymer matrix.

133. A dielectric material in accordance with claim 132, wherein the polymer matrix is an electrically-insulating polymer material.

5 134. A dielectric material in accordance with claim 132, wherein the material has anisotropic electrical properties.

135. A structure comprising a dielectric material in accordance with claim 132, wherein the structure is selected from the group consisting of capacitor dielectrics, circuit board materials, waveguide materials, optical index-matching materials, electromagnetic radiation absorbing materials, 10 electromagnetic radiation re-directing materials, optoelectronic materials, antenna arrays, materials for suspending antennas, electrically-loading antennas, and supports of antenna arrays.

136. A dielectric material in accordance with claim 126, wherein a dielectric constant of said dielectric material is at least about 10.

137. A dielectric material in accordance with claim 126, wherein a dielectric constant of 15 said dielectric material is at least about 100.

138. A dielectric material in accordance with claim 126, wherein a dielectric constant of said dielectric material is at least about 500.

139. A composition of matter comprising a plurality of single-wall carbon nanotubes coated at least in part with a polymer molecule wherein the single-wall carbon nanotubes change 20 dimensionally and electronically in response to chemical adsorption on the surface of the nanotube.

140. A structure comprising a composition of matter in accordance with claim 139, wherein the structure is a chemical sensor.

141. A structure comprising a composition of matter in accordance with claim 139, wherein the structure is a transducer.

25 142. A composition of matter comprising aggregates of single-wall carbon nanotubes coated at least in part with a polymer molecule wherein the single-wall carbon nanotubes change dimensionally and electronically in response to chemical adsorption on the surface of the nanotubes.

143. A composition of matter in accordance with claim 142, wherein the single-wall carbon nanotube aggregate comprises a rope of single-wall carbon nanotubes in which the nanotubes are 30 substantially aligned along their longitudinal axes.

144. A structure comprising a composition of matter in accordance with claim 142, wherein the structure is a chemical sensor.

145. A structure comprising a composition of matter in accordance with claim 142, wherein the structure is a transducer.

35 146. A material comprising a plurality of single-wall carbon nanotubes coated at least in part with a polymer and embedded in a polymer matrix, whereby the properties of an electromagnetic wave are capable of being modified by application of a field selected from the group consisting of an electric field and a magnetic field, wherein the material is selected from the group consisting of an electro-mechanical material and an opto-mechanical material.

147. A material comprising an aggregate of single-wall carbon nanotubes coated at least in part with a polymer and embedded in a polymer matrix, whereby the properties of an electromagnetic wave are capable of being modified by application of a field selected from the group consisting of an electric field and a magnetic field, wherein the material is selected from the group consisting of an electro-mechanical material and an opto-mechanical material.

148. A material in accordance with claim 147, wherein the single-wall carbon nanotube aggregate comprises a rope of single-wall carbon nanotubes in which the nanotubes are substantially aligned along their longitudinal axes.

149. A material in accordance with claim 147, wherein the single-wall carbon nanotube aggregate comprises a bundle of single-wall carbon nanotubes in which the nanotubes are substantially aligned along their longitudinal axes.

150. A fluid comprising a plurality of single-wall carbon nanotubes coated at least in part with a polymer and dispersed in a fluid, whereby the viscosity of the fluid is capable of being controlled by application of a field selected from the group consisting of an electric field, a magnetic field and combinations thereof.

151. A fluid comprising a plurality of aggregates of single-wall carbon nanotubes coated at least in part with a polymer and dispersed in a fluid, whereby the viscosity of the fluid is capable of being controlled by application of a field selected from the group consisting of an electric field, a magnetic field and combinations thereof.

152. A fluid in accordance with claim 151, wherein the single-wall carbon nanotube aggregate comprises a rope of single-wall carbon nanotubes in which the nanotubes are substantially aligned along their longitudinal axes.

153. A fluid in accordance with claim 151, wherein the single-wall carbon nanotube aggregate comprises a bundle of single-wall carbon nanotubes in which the nanotubes are substantially aligned along their longitudinal axes.

154. A film comprising a plurality of single-wall carbon nanotubes coated at least in part with a polymer.

155. A film comprising a plurality of aggregates of single-wall carbon nanotubes coated at least in part with a polymer.

156. A film in accordance with claim 155, wherein the single-wall carbon nanotube aggregate comprises a rope of single-wall carbon nanotubes in which the nanotubes are substantially aligned along their longitudinal axes.

157. A film in accordance with claim 156, wherein the single-wall carbon nanotube aggregate comprises a bundle of single-wall carbon nanotubes in which the nanotubes are substantially aligned along their longitudinal axes.

158. A fiber comprising a plurality of single-wall carbon nanotubes coated at least in part with a polymer.

159. A fiber comprising a plurality of aggregates of single-wall carbon nanotubes coated at least in part with a polymer.

160. A fiber in accordance with claim 159, wherein the single-wall carbon nanotube aggregate comprises a rope of single-wall carbon nanotubes in which the nanotubes are substantially aligned along their longitudinal axes.

5 161. A fiber in accordance with claim 159, wherein the single-wall carbon nanotube aggregate comprises a bundle of single-wall carbon nanotubes in which the nanotubes are substantially aligned along their longitudinal axes.



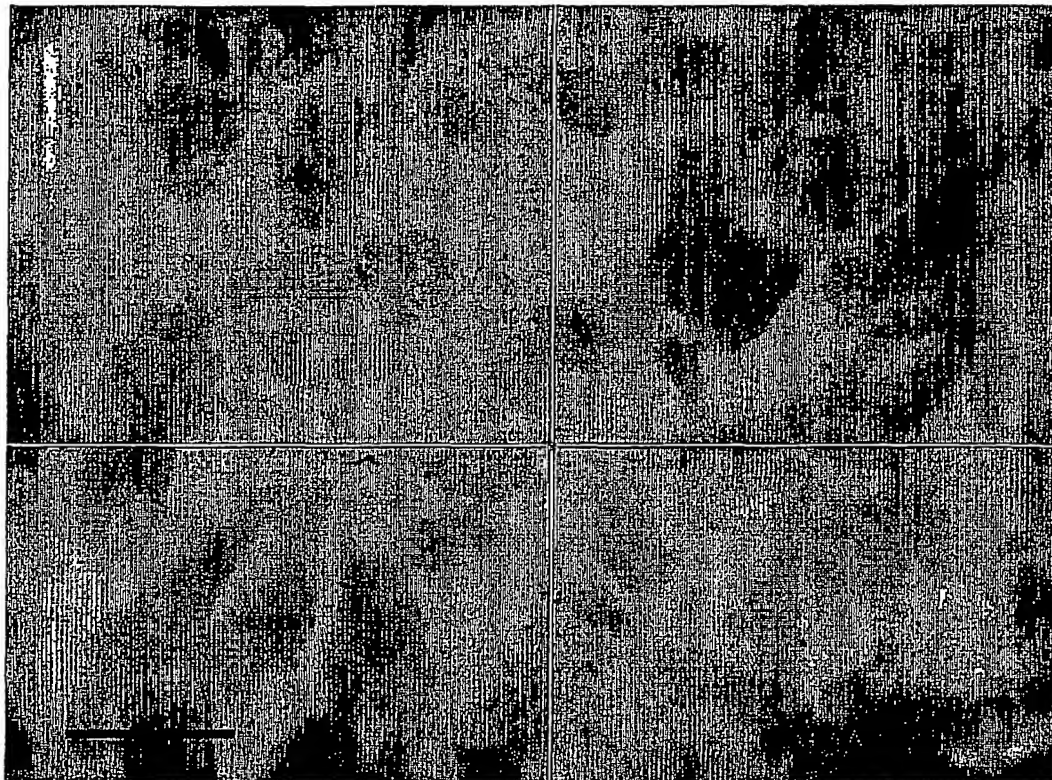


Fig. 5

Fig. 2A

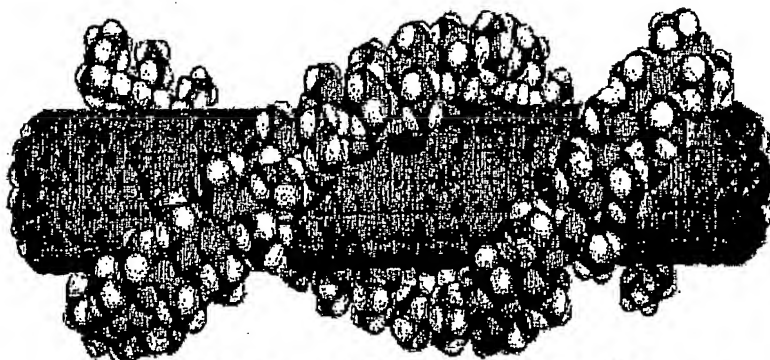


Fig. 2B

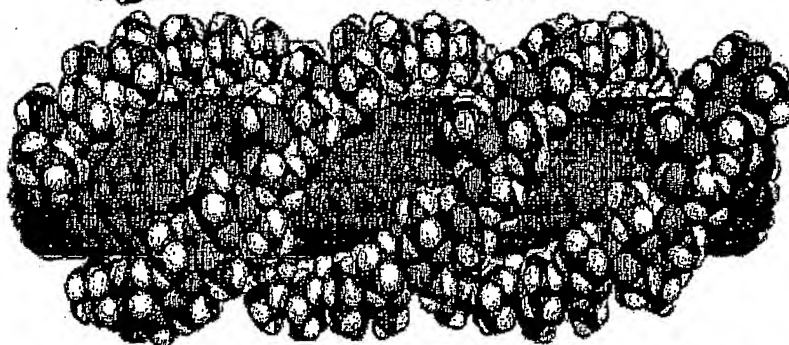


Fig. 2C

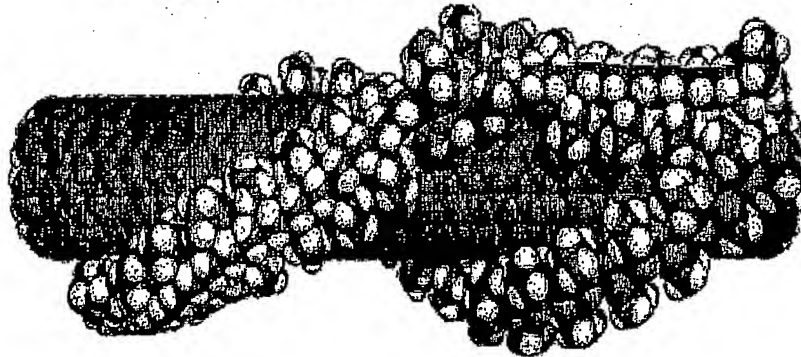


Fig. 3A

Fig. 3B

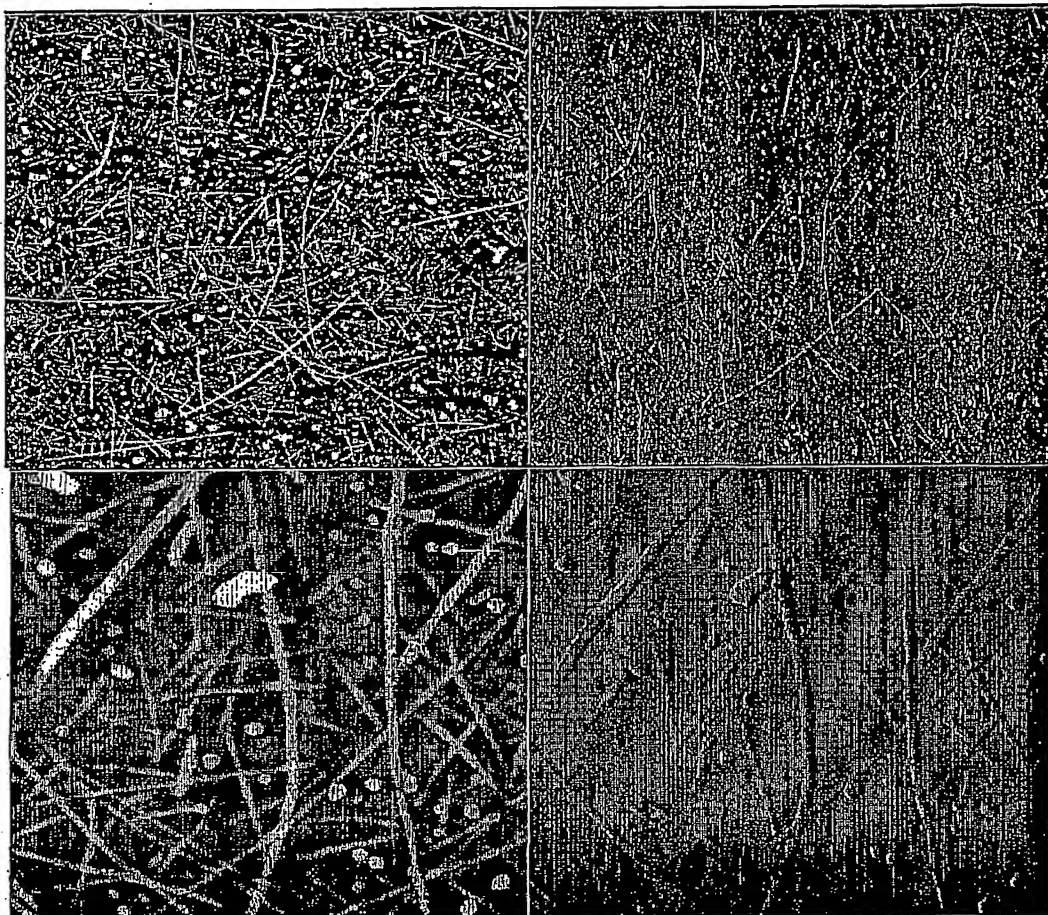


Fig. 3C

Fig. 3D

Fig. 4A

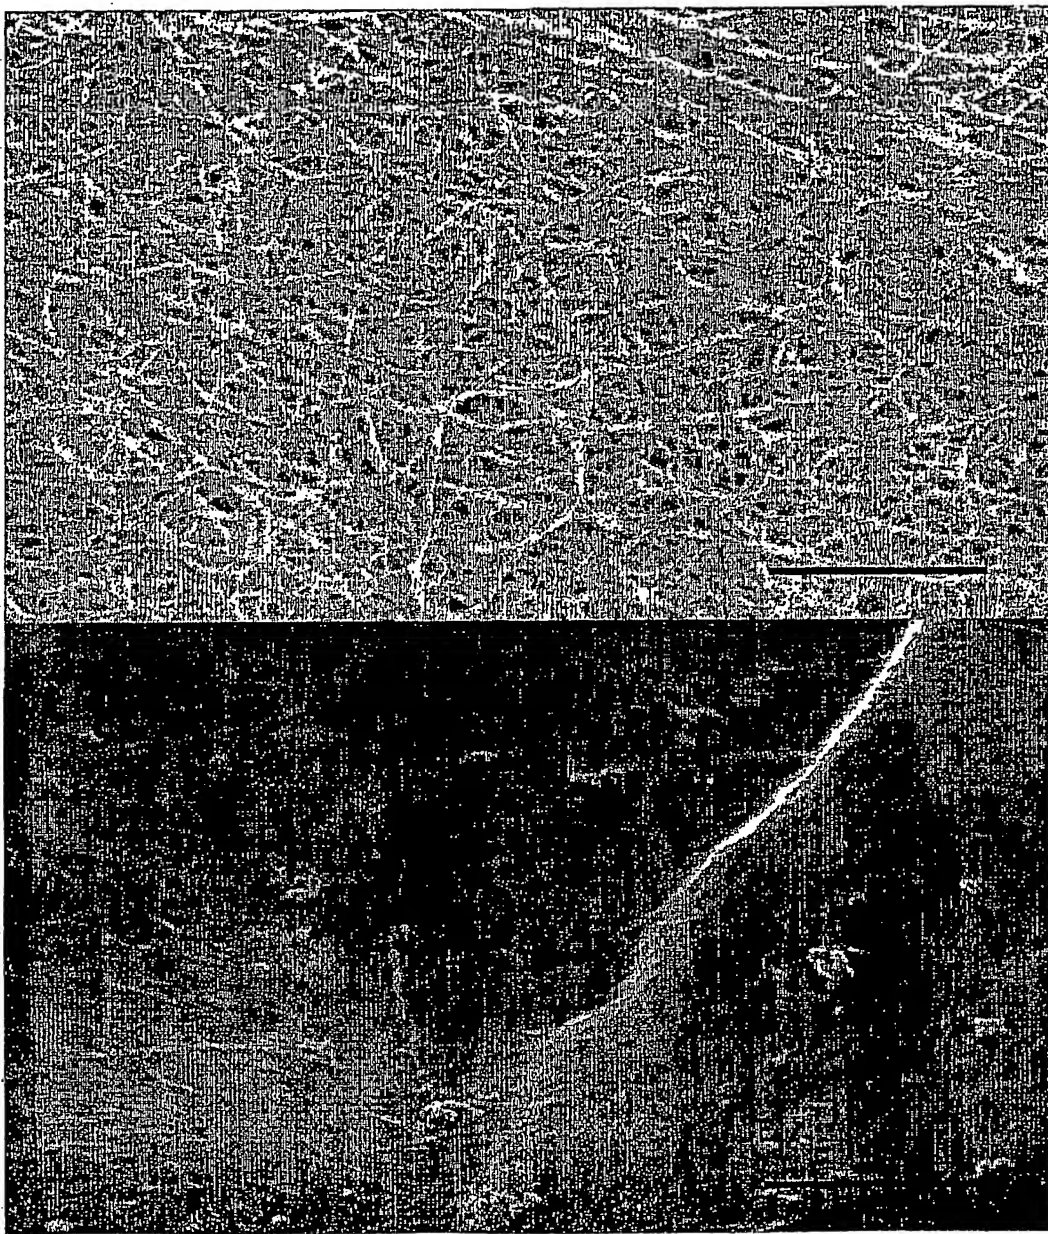


Fig. 4B

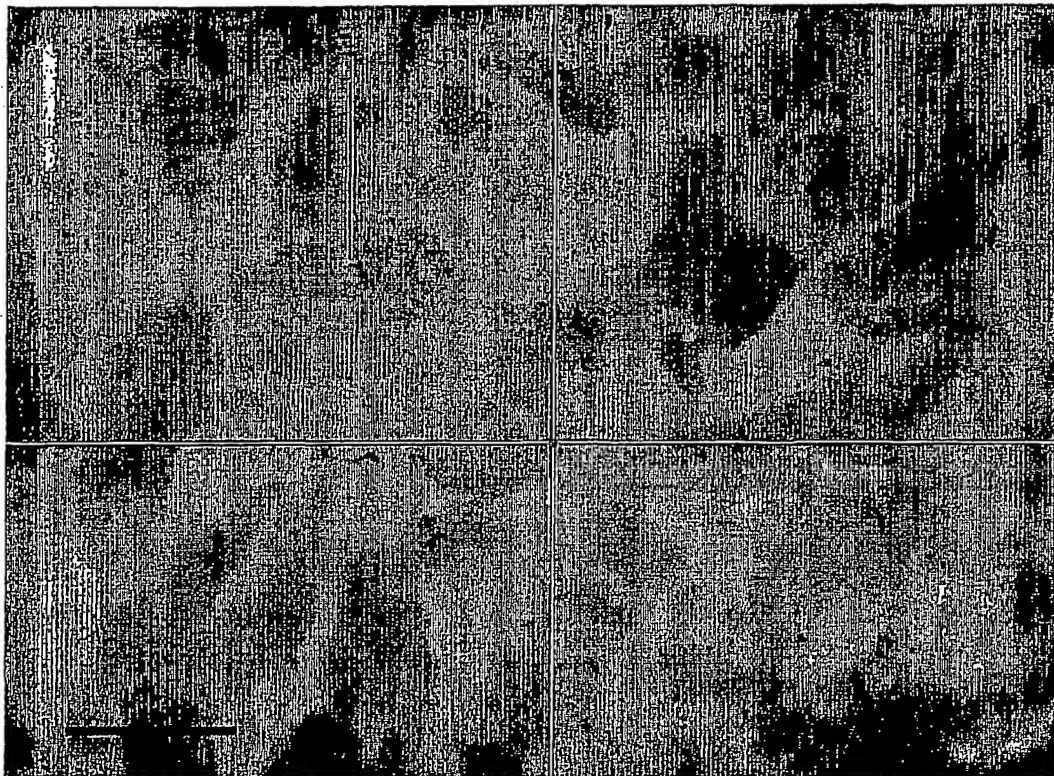


Fig. 5




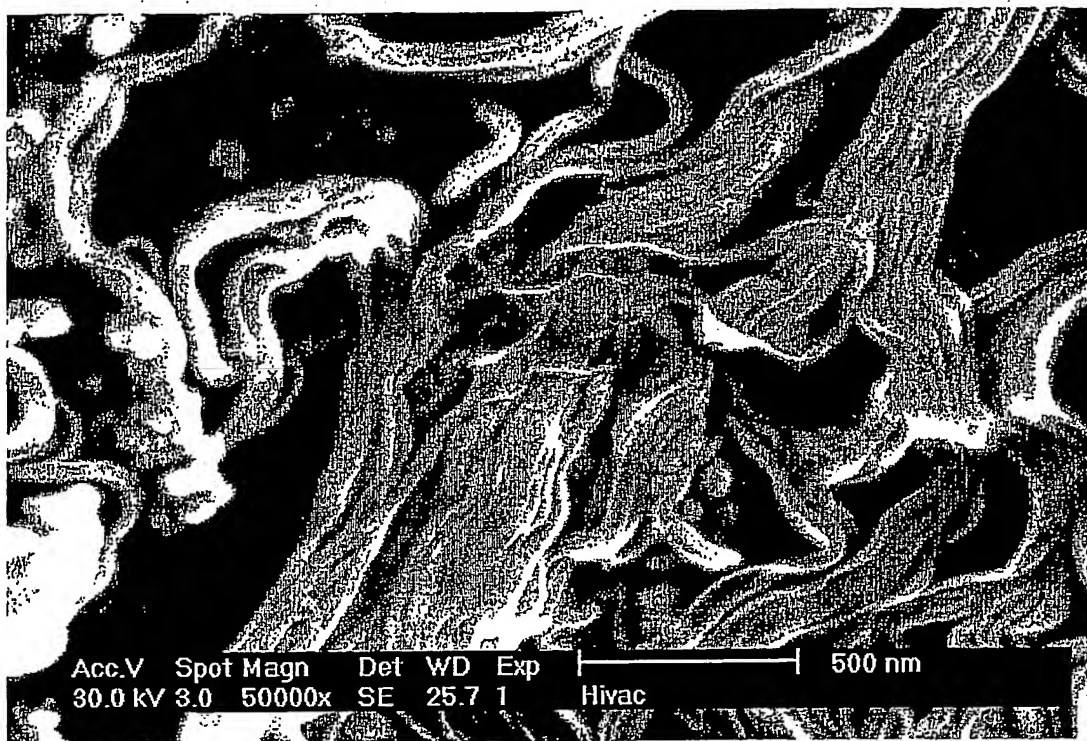


Fig. 6



(19) World Intellectual Property Organization  
International Bureau

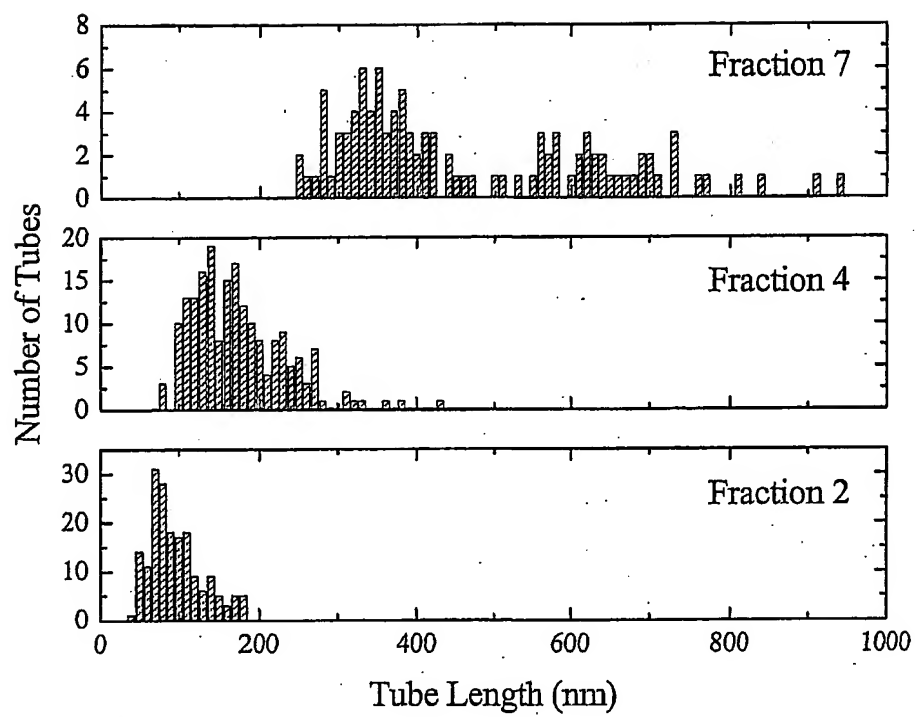

(43) International Publication Date  
28 February 2002 (28.02.2002)

PCT

(10) International Publication Number  
**WO 02/16257 A3**

(51) International Patent Classification: D01F 9/12, C01B  
31/00, B05D 1/28, 3/02, D02G 3/00, B32B 9/00

(21) International Application Number: PCT/US01/26308

(22) International Filing Date: 23 August 2001 (23.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
60/227,604 24 August 2000 (24.08.2000) US  
60/268,269 13 February 2001 (13.02.2001) US

(71) Applicant (for all designated States except US):  
WILLIAM MARSH RICE UNIVERSITY [US/US];  
6100 Main Street, Houston, TX 77005 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): SMALLEY,  
Richard, E. [US/US]; 1816 Bolsover Street, Houston,  
TX 77005 (US). COLBERT, Daniel, T. [US/US]; 1911

Milford Street, Houston, TX 77098 (US). SMITH, Ken,  
A. [US/US]; 333 Dominion, Apartment 1334, Katy, TX  
77450 (US). O'CONNELL, Michael [US/US]; 2111  
Holly Hall, Apartment 2702, Houston, TX 77054 (US).


(74) Agents: GARSSON, Ross, Spencer et al.; Winstead  
Sechrest & Minick P.C., P.O. Box 50784, 1201 Main  
Street, Dallas, TX 75250-0784 (US).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,  
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,  
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,  
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,  
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,  
MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK,  
SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA,  
ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,  
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian  
patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European  
patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE,  
IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF,

[Continued on next page]

(54) Title: POLYMER-WRAPPED SINGLE WALL CARBON NANOTUBES

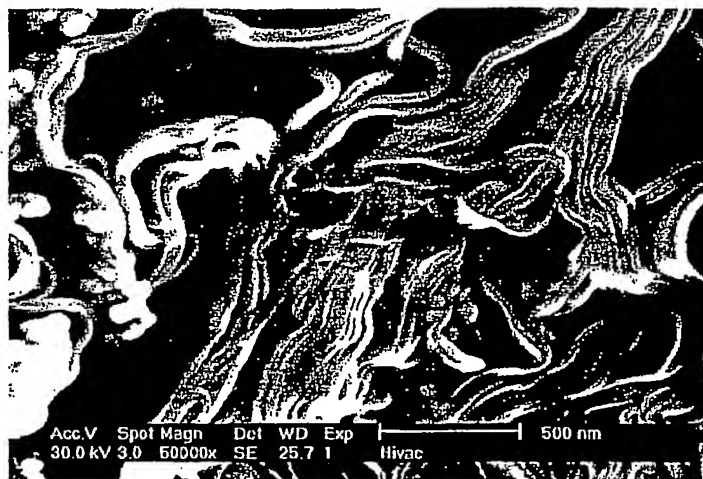

(57) Abstract: The present invention relates to new compositions of matter and articles of manufacture comprising SWNTs as nanometer scale conducting rods dispersed in an electrically-insulating matrix. These compositions of matter have novel and useful electrical, mechanical, and chemical properties including applications in antennas, electromagnetic and electro-optic devices, and high-toughness materials. Other compositions of matter and articles of manufacture are disclosed, including polymer-coated and polymer wrapped single-wall nanotubes (SWNTs), small ropes of polymer-coated and polymer-wrapped SWNTs and materials comprising same. The composition provides one embodiment of the SWNT conducting-rod composite mentioned above, and also enables creation of high-concentration suspensions of SWNTs and compatibilization of SWNTs with polymeric matrices in composite materials. This solubilization and compatibilization, in turn, enables chemical manipulation of SWNT and production of composite fibers, films, and solids comprising SWNTs.





CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(88) Date of publication of the international search report:  
10 May 2002

**Published:**

— with international search report

*For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

# INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US01/26908

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : D01F 9/12, C01B 31/00; B05D 1/28, 3/02; D02G 3/00; B32B 9/00  
US CL : 423/447.1, 447.3, 445B; 427/372.2, 430.1; 428/364, 408  
According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 423/447.1, 447.3, 445B; 427/372.2, 430.1; 428/364, 408

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
EAST - search terms carbon nanotube, single wall, coat, pvp, polyvinyl (sulfate, alcohol, pyrrolidone), dextran, glycol, polystyrene sulfonate

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y, P	US 6,250,984 B1 (JIN ET AL) 26 JUNE 2001; see entire document.	1-161
Y, E	US 6,322,713 B1 (CHOI ET AL), 27 NOVEMBER 2001, abstract, column 4, lines 5-48.	1-161
Y, P	PCT WO01/12886 A1 (MIDWEST RESEARCH INSTITUTE) 22 FEBRUARY 2001, see entire document.	1-161

☐ Further documents are listed in the continuation of Box C. ☐ See patent family annex.

* Special categories of cited documents:	"I" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"A" document defining the general state of the art which is not considered to be of particular relevance	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"E" earlier document published on or after the international filing date	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"L" document which may throw doubts on priority claim or which is cited to establish the publication date of another citation or other special reason (as specified)	"Z" document member of the same patent family
"O" document referring to an oral disclosure, use, exhibition or other means	
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

01 FEBRUARY 2002

Date of mailing of the international search report

25 FEB 2002

Name and mailing address of the ISA/US  
Commissioner of Patents and Trademarks  
Box PCT  
Washington, D.C. 20231  
Facsimile No. (703) 305-3230

Authorized officer

JILL M. GRAY

Telephone No. (703) 308-0661

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**